



*Changes for the Better*

Wire-cut EDM Systems  
MV Series



**BREAKTHROUGH  
INNOVATION**

for a greener tomorrow



# New generation makes it's mark in a continuously updated lineage.

1972



DWC50S-LT1



DWC50H-DNC2



DWC100H-CNC2



DWC90-CNC1


1980



DWC110N-CNC1



PX05




FX10




DWC90PA




CX20




SX20



FX20K



QA20




RA90AT


2000



FA20




FA20P



Oil wire-cut EDM  
MX600

2013




PA10 ADVANCE

2012





DWC90FSK-CNC1



DWC90G




DWC90H




DWC90PH



DWC110PH



DWC90C



DWC400HA



DWC110SA



DWC110SZ




DWC90SB




DWC90HA

*1990*



PA20




FA30V




PA05S



FA20S




FA10PS




NA2400P



BA8



FA20S Advance



FA50V

MITSUBISHI ELECTRIC Wire-cut EDM Systems

# MV Series

# Next-generation Innovations of our best selling Performance Machine




# MV Series

# Wire-cut EDM Systems Line up

Model line-up covers your machining needs  
from piece parts to super-accurate mold making

## MX 600

Flagship model incorporating  
extreme precision machining

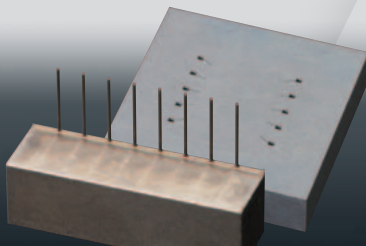

### Ultrahigh accuracy machines



Oil


## MP Series

High-class model incorporating  
a ultra-high accuracy machining






## PA05S ADVANCE

Flagship model incorporating  
extreme precision machining



Micro slit width 23µm

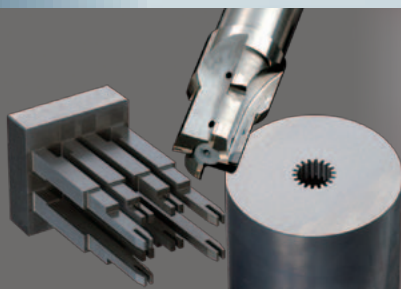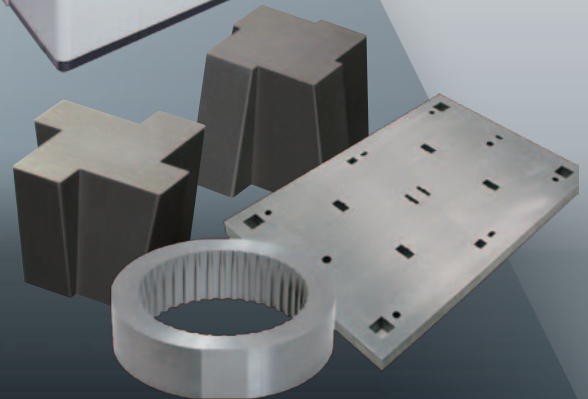

### High-performance machine

## MV-R Series

High-performance model innovating  
next-generation high-performance machine



### High-productivity machine

## MV-S Series

Standard model pursuing  
a cost performance standard machine



## Revolutionary MV1200R / MV2400R

High-performance Wire-cut EDMs

ADVANCE PLUS

4-axis LSM (XYUV linear shaft motor)

Four-sided hardened table



MV1200R  
(manual vertical front door)



MV2400R  
(automatic vertical front door)

## Standard MV1200S / MV2400S

Standard Wire-cut EDMs

2-axis LSM (XY linear shaft motor)

U-shaped hardened table




MV1200S  
(manual vertical front door)




MV2400S  
(automatic vertical front door)

MV1200R/S


<Outline drawing>

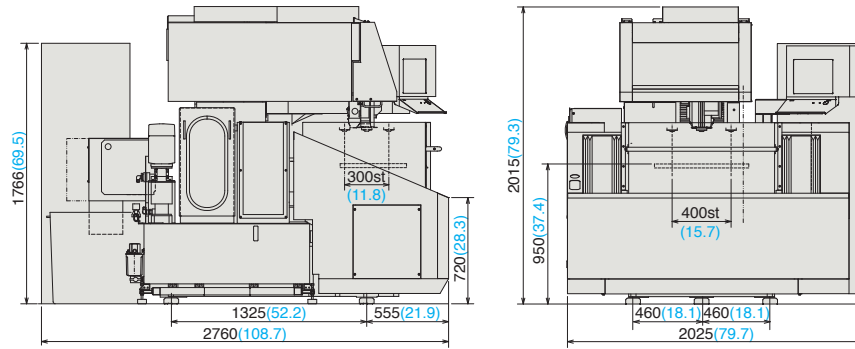


<Layout drawing> (Unit:mm (in))

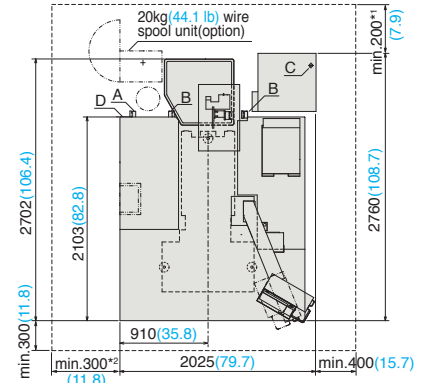

<Table drawing>



One-piece 4-sided table hardened stainless steel (MV1200R)




Three-piece U-shaped table hardened stainless steel (MV1200S)

\*1 is min.500(19.7) and \*2 is min.700(27.6) when the 20kg(44.1lb) wire spool unit is mounted.  
Machine unit dimensions  
Width:1910mm(75.2) Height:2015mm(79.3)


A: Clean tank drain port Fitted with PT1 screw valve (165mm from floor)  
B: Dirty tank drain port Fitted with PT1 screw valve (165mm from floor)  
C: Power supply port 200/220VAC±10% 50/60Hz, 13.5kVA  
D: Primary air side 0.5 to 0.7MPa, 75 ℓ/min or more, 1/4 hose connection (hose sleeve outer diameter: ø9mm)

MV2400R/S


<Outline drawing>

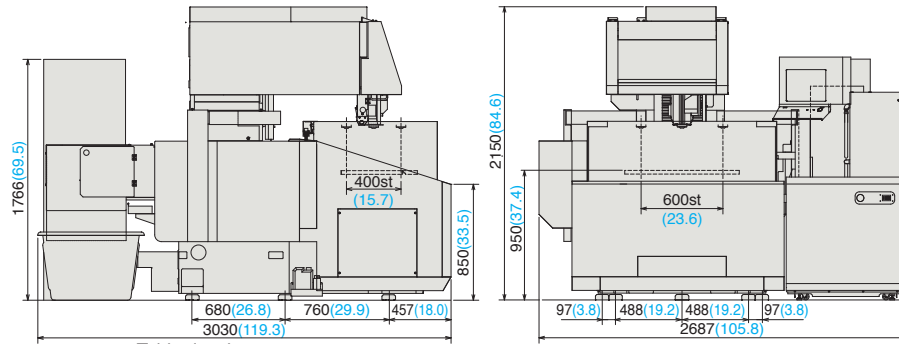


<Layout drawing> (Unit:mm (in))

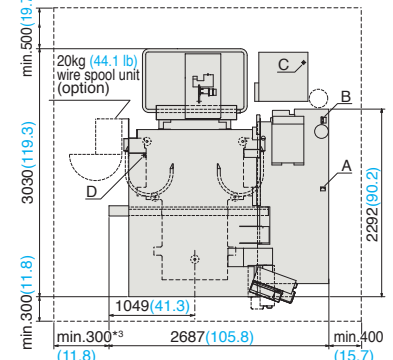

<Table drawing>



One-piece 4-sided table hardened stainless steel (MV2400R)



Three-piece U-shaped table hardened stainless steel (MV2400S)

\*3 is min.670(26.4) when the 20kg(44.1lb) wire spool unit is mounted.  
Footprint: 3387(133.3)×3830(150.8)(including maintenance space)  
Machine unit dimensions  
Width:2022mm(79.6) Height:2150mm(84.6)

A: Clean tank drain port Fitted with PT1/2 screw valve (52mm from floor)  
B: Dirty tank drain port Fitted with PT1 screw valve (52mm from floor)  
C: Power supply port 200/220VAC±10% 50/60Hz, 13.5kVA  
D: Primary air side 0.5 to 0.7MPa, 75 ℓ/min or more, 1/4 hose connection (hose sleeve outer diameter: ø9mm)

Standard machine specifications

	MV1200R	MV1200S	MV2400R	MV2400S
Model	MV1200R	MV1200S	MV2400R	MV2400S
Max. workpiece dimensions [mm](in)	810(31.9)×700(27.6)×215(8.5)		1050(41.3)×820(32.3)×305(12)	
Max. workpiece weight [kg](lb)	500(1102)		1500(3307)	
Table dimensions [mm](in)	640(25.2)×540(21.3) (4-sided)		840(33)×640(25.2) (4-sided)	840(33)×560(22) (U-shaped)
Machine travels (XxYxZ) [mm](in)	400(15.7)×300(11.8)×220(8.7) (XY axis OPT-drive specifications)			
Machine travels (UxV) [mm](in)	±60(2.4)×±60(2.4) (OPT-drive specifications)		±75(2.9)×±75(2.9) (OPT-drive specifications)	
Max. taper angle [°]	15° (max. 200mm(7.9"))		15° (max. 260mm(10.2"))	
Wire diameter [mm](in)	0.1(.004) ~ 0.3(.012)**			
Weight [kg](lb)	2700(5952) (including dielectric fluid reservoir)		3500(7716)	
Tank capacity [ℓ](US gal)	550(145)		860(227)	
Filtration method	Paper filter (2)			
Filtered particle size [μm]	3			
Water purifier (ion exchange resin) [ℓ](cu.ft.)	10(0.35)			
Dielectric fluid chiller unit	Unit cooler			
Weight (dry) [kg](lb)	— (included in the machine unit weight)		350(711)	

\*1 ø0.2(.008") DD guides and ø1.5(.006") jet nozzle are standard equipment.

General input [kVA]	13.5	
Required air rate	Air pressure [Mpa](psi)	0.5(70) ~ 0.7(100)
	Air rate [ℓ (cu.ft.)/min]	75(2.6) or more

Standard functions

- Automatic wire threading
- Digital-AE II power supply
- LAN/W
- Angle Master (S/W)
- Anti-virus protection (MV1200R/2400R)
- Sleep mode (MV1200R/2400R)

Options for MV-R series

- ø0.05(.002"), 0.07(.003") automatic wire threading
- Angle Master ADVANCE (S/W)
- Digital-FS power supply
- High voltage power supply (for processing-resistant materials)
- COREHOLD

Options

- 20kg(44.1lb) wire spool unit
- Angle Mater guide kit ø0.2(0.008")
- Angle Mater guide kit ø0.25(0.010")
- Advanced manual control box
- External signal output
- 3-color warning light
- Run timer
- Option box
- LED light
- 4-piece filter system (MV2400R/2400S)
- Anti-virus protection (MV1200S/2400S)

## MV2400S (column up specification)

2-axis LSM (XY linear shaft motor)

Four-sided hardened table



(automatic vertical front door)

## MV4800

2-axis LSM (XY linear shaft motor)


U-shaped hardened table




(automatic vertical front door)




### MV2400S (column up specification)

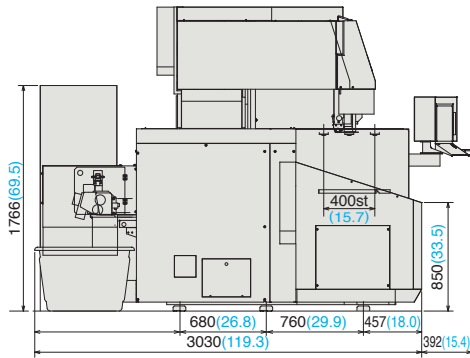


<Outline drawing>

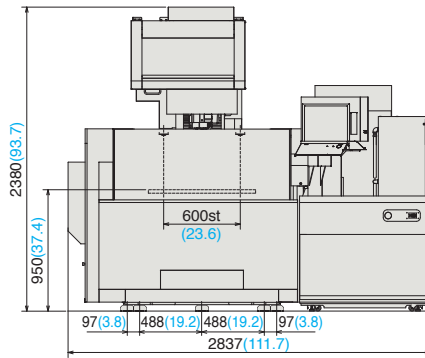

<Layout drawing> (Unit:mm (in))

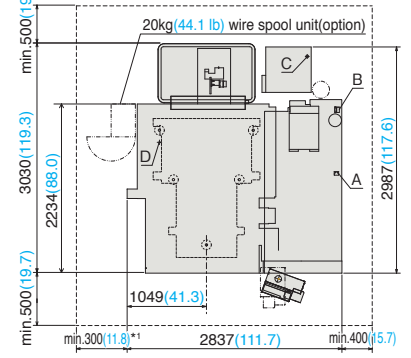

<Table drawing>

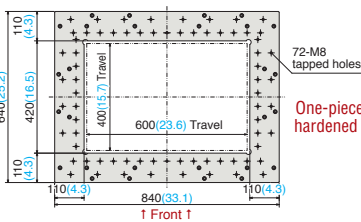


One-piece 4-sided table  
hardened stainless steel


\*1 is min.670(26.4) when the 20kg(44.1lb) wire spool unit is mounted.  
Footprint : 3537(139.3)x4222(166.2)(including maintenance space)  
Machine unit dimensions  
Width:2085mm(82.1) Height:2380mm(93.7)

- A: Clean tank drain port Fitted with PT1/2 screw valve (52mm from floor)
- B: Dirty tank drain port Fitted with PT1 screw valve (52mm from floor)
- C: Power supply port 200/220VAC±10% 50/60Hz, 13.5kVA
- D: Primary air side 0.5 to 0.7MPa, 75 ℓ /min or more, 1/4 hose connection (hose sleeve outer diameter: ø9mm)


### MV4800

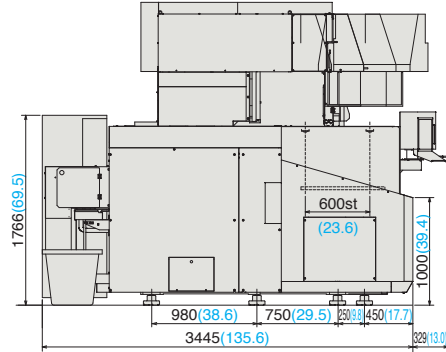


<Outline drawing>

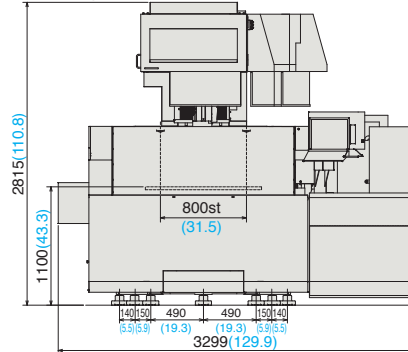

<Layout drawing> (Unit:mm (in))

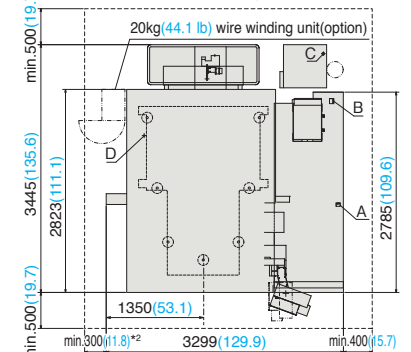

<Table drawing>

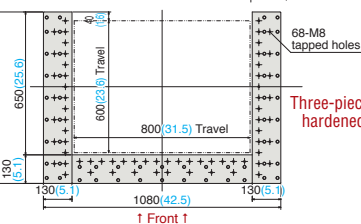

Three-piece U-shaped table  
hardened stainless steel

\*2 is min.570(22.4) when the 20kg(44.1lb) wire spool unit is mounted.  
Footprint : 3999(157.4)x4445(175.0)(including maintenance space)  
Machine unit dimensions  
Width:2587mm(101.9) Height:2815mm(110.8)

- A: Clean tank drain port Fitted with PT1/2 screw valve (52mm from floor)
- B: Dirty tank drain port Fitted with PT1 screw valve (52mm from floor)
- C: Power supply port 200/220VAC±10% 50/60Hz, 13.5kVA
- D: Primary air side 0.5 to 0.7MPa, 75 ℓ /min or more, 1/4 hose connection (hose sleeve outer diameter: ø9mm)

### Standard machine specifications

	Model	MV2400S (column up specification)	MV4800
Machine unit	Max. workpiece dimensions [mm](in)	1050(41.3)x820(32.3)x420(16.5)	1250(49.2)x1020(40.2)x505(19.9)
	Max. workpiece weight [kg](lb)	1500(3307)	3000(6614)
	Table dimensions [mm](in)	840(33.1)x640(25.2) (4-sided)	1080(42.5)x780(30.7) (U-shaped)
	Machine travels (XxYxZ) [mm](in)	600(23.6)x400(15.7)x425(16.7) (XY axis OPT-drive specifications)	800(31.5)x600(23.6)x510(20.1) (XY axis OPT-drive specifications)
	Machine travels (UxV) [mm](in)	±75(3.0)x±75(3.0) (Ball screw specifications)	±100(3.94)x±100(3.94) (Ball screw specifications)
	Max. taper angle [°]	15°(max. 260mm(10.2"))	15°(max. 355mm(14.0"))
Dielectric fluid reservoir	Wire diameter [mm](in)	0.1(.004) ~ 0.3(.012)*1	0.15(.005) ~ 0.3(.012)*1
	Weight [kg](lb)	3650(8047)	5700(12566)
	Tank capacity [ℓ](US gal)	980(259)	1480(391)
	Filtration method	Paper filter (2)	Paper filter (4)
	Filtered particle size [μm]		3
Water purifier (ion exchange resin) [ℓ](cu.ft.)		10(0.35)	
Dielectric fluid chiller unit		Unit cooler	
Weight (dry) [kg](lb)	390(860)	450(992)	

\*1 ø0.2(.008") DD guides and ø1.5(.006") jet nozzle are standard equipment.

General input		[kVA]	13.5
Required air rate	Air pressure [Mpa](psi)		0.5(70) ~ 0.7(100)
	Air rate [ℓ (cu.ft.)/min]		75(2.6) or more

### Standard functions

- Automatic wire threading
- Digital-AE II power supply
- LAN/W
- Angle Master (S/W)
- Sleep mode (MV4800)

### Options

- 20kg(44.1lb) wire spool unit
- 50kg(110.2lb) wire spool unit
- Angle Mater guide kit ø0.2(0.008")
- Angle Mater guide kit ø0.25(0.010")
- Angle Master ADVANCE (S/W) (MV4800)

- Advanced manual control box
- External signal output
- 3-color warning light
- Run timer

- Option box
- LED light
- 4-piece filter system (MV2400S column up specification)
- Anti-virus protection

# Functions and Features


Fully equipped with useful functions for the manufacturing workplace, featuring refined style, high performance, energy savings, simple operation and vast expertise

## Revolutionary ADVANCE PLUS MV1200R / MV2400R



**High-value-added machining**  
<options for MV-R series>

**Digital-FS power supply**  
Optimum surface roughness of R<sub>z</sub>0.4μm/Ra0.05μm(Tungsten carbide)  
Wire electrode : ø0.2(.008")/BS  
Workpiece : Tungsten carbide, t10mm(.4")  
Surface roughness : R<sub>z</sub>0.4μm/Ra0.05μm



**ø0.05(.002"), ø0.07(.003") automatic wire threading**  
ø0.05(.002") wire electrode available  
Wire electrode : ø0.05(.002")/SP  
Workpiece : Steel(PD613),  
Length 20mm(.79") width 2mm(.08")



Ultimate optimization of EDM technology  
**Super Digital Control**  
**DMX-S**  
Digital Matrix Sensor  
Digital technology optimizes all enhanced functions required by Wire-cut EDMs

### Innovative automatic wire threading




- New annealing system greatly improves wire threading with a curl ratio of less than 10%
- Wire break point insertion is greatly improved for thick workpieces
- Wire threading mode can be selected to match the workpiece shape (i.e., jet stream on, jet stream off and submerged break point insertion)



### Improved machining accuracy



- Equipped with a linear shaft motor (LSM)
- Mitsubishi Electric's optical drive system uses fiber-optic communications between the control unit, servo amplifier and linear motor to improve machining accuracy

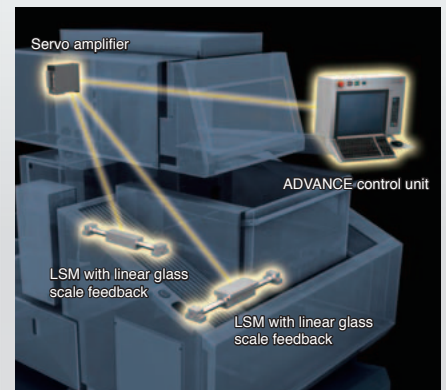

**ADVANCE PLUS control offers maximum efficiency using a fully optical drive system (MV1200R/2400R)**

Refer to page 23-24

- Machining time reduced up to 17%** (FA series ratio)
- Corner accuracy ±1µm**
- Circular accuracy within 2µm**
- Power consumption reduced up to 69%** (FA Series ratio)
- Anti-virus protection**  
 McAfee® is a registered trademark of McAfee, Inc. in the United State and other countries

**Standard**  
 MV1200S / MV2400S




**Angle Mater ADVANCE**

Taper accuracy is improved regardless of wire angle direction  
 Wire electrode : ø0.2(.008")/BS  
 Workpiece : Steel(SKD11), t140mm(5.5")



**COREHOLD (Sludge retention)**

The sludge to be automatically held in place after the rough cut for complete unattended operation  
 Wire electrode : ø0.2(.008")/BS  
 Workpiece : Steel(SKD11), t5mm(.2")

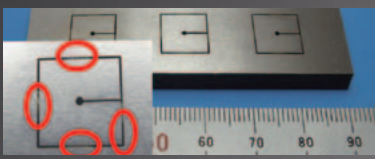


**Improved productivity**



- Faster machining is realized with improved power-supply performance (Rz3.5µm/Ra0.45µm with 3 cuts) (Rz2.0µm/Ra0.28µm with 4 cuts)
- All machining conditions are provided (speed condition, nozzle release condition)

Machining time comparison for Rz3.5µm/Ra0.45µm with 3 cuts



Wire electrode: ø0.2(.008")/BS  
 Workpiece: Steel(SKD11) t60mm(2.4")


\*Compared to conventional Mitsubishi Electric Wire-cut EDM (FA Series)

**Easy operation**



- Search function for machining conditions is improved by a narrow-down function
- Job scheduling adjustments use the schedule call back, extra job insertion and ME-pack feature
- \*ME-pack is a package of machining processes including offset, machining speed and adaptive control settings

Machining condition search screen

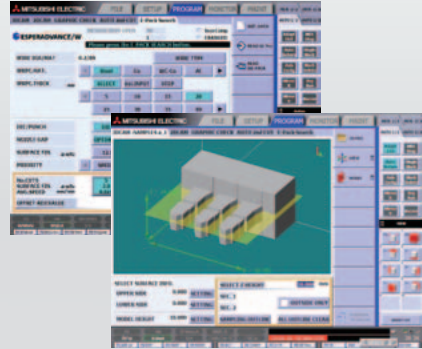

3D CAM screen

**Energy savings, low running cost**




- Power consumption reduced up to 69%  
 Conventional model: 100%  
 MV-S: Reduced 55%  
 MV-R: Reduced 69%
- Filter cost reduced up to 45% (Automatic changing filtration flow rate)  
 Conventional model: 100%  
 MV-R/S: Reduced 45%
- Wire consumption reduced up to 46%  
 Conventional model: 100%  
 MV-S: Reduced 42%  
 MV-R: Reduced 46%
- Ion exchange resin cost reduced up to 25%  
 Conventional model: 100%  
 MV-R/S: Reduced 25%

\*Compared to conventional Mitsubishi Electric Wire-cut EDM (FA Series)

# Machining Samples


Revolutionizing product creation with high-performance machining required for future generations

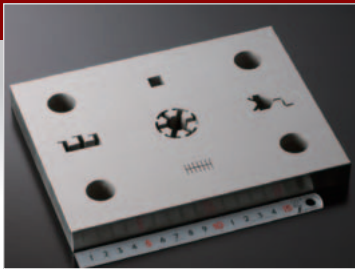

## Highly accurate pitch machining

Model	MV2400R <small>ADVANCE</small>
Electrode material	φ0.2(.008")/BS
Workpiece	Steel(PD613)
Workpiece thickness	20mm(.787")
Surface roughness	Rz2.5μm/Ra0.32μm/13μ"Ra
Machining accuracy	Pitch ±2μm


- Stable automatic threading is realized using Intelligent AT during multi-shape machining
- Highly accurate machining is possible using ODS

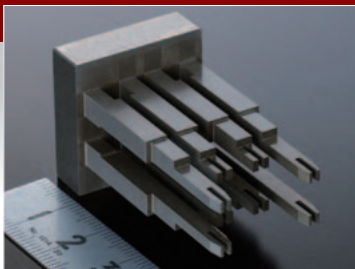

## Connector machining

Model	MV1200R <small>ADVANCE</small>
Electrode material	φ0.2(.008")/BS
Workpiece	Steel(SKD11)
Workpiece thickness	4~25mm(0.16~0.98")
Surface roughness	Rz3.1μm/Ra0.38μm/15μ"Ra
Machining accuracy	±3μm


- Highly accurate machining is possible using ODS
- A machining accuracy of ±3μm is realized for high L/D machining of pin widths from 1.0 to 4.5mm and a length of 40mm

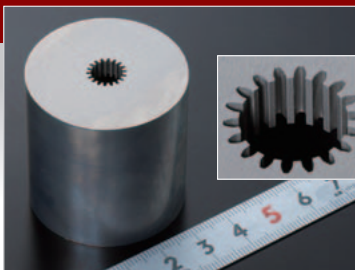

## Gear machining

Model	MV1200R <small>ADVANCE</small>
Electrode material	φ0.1(.004")/BS
Workpiece	Steel(SKD11)
Workpiece thickness	5mm(.197")
Surface roughness	Rz2.0μm/Ra0.26μm/10μ"Ra
Machining accuracy	±2μm


- Highly accurate machining is possible using ODS
- New corner machining control (CM3) improves shape accuracy to within ±2μm under nozzle release conditions

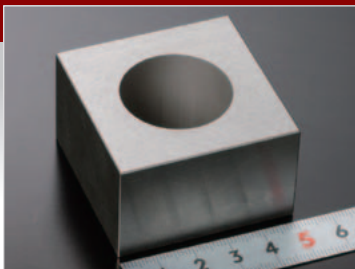

## Circular machining

Model	MV1200R <small>ADVANCE</small>
Electrode material	φ0.2(.008")/BS
Workpiece	Steel(SKD11)
Workpiece thickness	30mm(1.181")
Surface roughness	Rz2.0μm/Ra0.28μm/11μ"Ra
Machining accuracy	Roundness 2.0μm

- Circular accuracy is improved using ODS
- Bumps or undercuts at the approach point are suppressed, attaining precise circular cuts

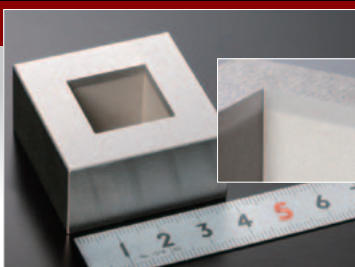

## Cutting edge machining

Model	MV1200R <small>ADVANCE</small>
Electrode material	φ0.2(.008")/BS
Workpiece	Steel(SKD11)
Workpiece thickness	20mm(.787")
Surface roughness	Rz2.5μm/Ra0.32μm/13μ"Ra
Machining accuracy	±3μm

- Highly accurate machining is possible using ODS
- Improved taper accuracy using PFC creates uniform cutting edge lengths



## Thick workpiece machining

Model	MV2400S <small>ADVANCE</small>
Electrode material	φ0.25(.010")/BS
Workpiece	Steel(SKD11)
Workpiece thickness	200mm(7.9")
Surface roughness	Rz4.8μm/Ra0.71μm/28μ"Ra
Machining accuracy	±3μm

- High-speed and precise straight machining are possible using PFC
- A straight-line accuracy within 5μm is possible even with a 200mm-thick workpiece



\* The listed machining results are all based on in-house conditions and measurements.  
(Note) JIS B0601: '01 and ISO 4287: '97/ISO 1302: '02 compliant (Rz≡ conventional notation Ry)



## Punch

Model	MV2400R <small>ADVANCE</small>
Electrode material	ø0.2(.008")/BS
Workpiece	Steel(SKD11) Tungsten carbide(KD20)
Workpiece thickness	60mm(2.36")
Surface roughness	Rz1.2μm/Ra0.18μm/7μ"Ra Rz0.8μm/Ra0.12μm/5μ"Ra
Machining accuracy	±2μm

- Ultrafine surface finish is possible using Digital-FS for punch machining
- A corner accuracy of ±1μm is possible using CM3 control  
\*CM3 (Corner Master 3) : corner machining control
- Digital-FS power supply <option for MV-R series>



## Taper

Model	MV2400R <small>ADVANCE</small>
Electrode material	ø0.2(.008")/Mega-T
Workpiece	Steel(SKD11)
Workpiece thickness	30mm(1.18"), taper angle 15°
Surface roughness	Rz4μm/Ra0.6μm/24μ"Ra
Machining accuracy	Taper ±0.01°

- Taper accuracy is improved regardless of wire angle direction using Angle Master ADVANCE
- ODS provides high accuracy when cutting a U-V independent tapered shape
- Angle Master ADVANCE <option for MV-R series>



## Pitch machining

Model	MV2400R <small>ADVANCE</small>
Electrode material	ø0.2(.008")/BS
Workpiece	Steel(SKD11)
Workpiece thickness	50mm(1.97")
Surface roughness	Rz18μm/Ra2.7μm/106μ"Ra
Machining accuracy	-

- COREHOLD provides sludge retention to hold core after the rough cut for complete unattended operation (Sludge retention positions and lengths can be automatically set in place)
- COREHOLD <option for MV-R series>



## Slide core

Model	MV2400S
Electrode material	Die :ø0.20(.008")/BS Punch :ø0.25(.010")/BS
Workpiece	Steel(SKD11)
Workpiece thickness	Die :100mm(3.9") Punch :150mm(5.9")
Surface roughness	Rz3.5μm/Ra0.45μm/18μ"Ra
Machining accuracy	±5μm


- Thick workpieces can be machined with high straight-line accuracy using ODS
- High-speed and precise straight machining are realized using PFC



## Fit machining

Model	MV1200S
Electrode material	ø0.2(.008")/BS
Workpiece	Steel(SKD11)
Workpiece thickness	Die :20mm(.78") Punch :50mm(1.97")
Surface roughness	Rz2.0μm/Ra0.28μm/11μ"Ra
Machining accuracy	±3μm

- Stable automatic threading is realized using Intelligent AT during multi-shape machining
- Productivity is improved by reducing machining time using PFC

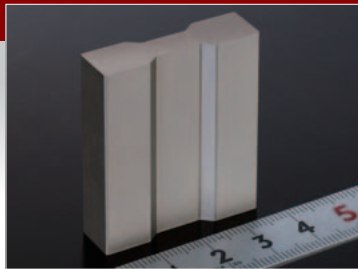

## Parts machining

Model	MV1200S
Electrode material	ø0.2(.008")/BS
Workpiece	Titanium alloy
Workpiece thickness	40mm(1.6")
Surface roughness	Rz2.2μm/Ra0.28μm/11μ"Ra
Machining accuracy	±5μm


- High-speed and highly accurate machining are possible using PFC
- High-grade machining of special materials (e.g., titanium, graphite, PCD) is realized using a standard V power-supply



\* The listed machining results are all based on in-house conditions and measurements.  
 (Note) JIS B0601: '01 and ISO 4287: '97/ISO 1302: '02 compliant (Rz≡ conventional notation Ry)

# Intelligent AT Innovative Automatic Wire Threading

Advanced technology for greatly improved productivity

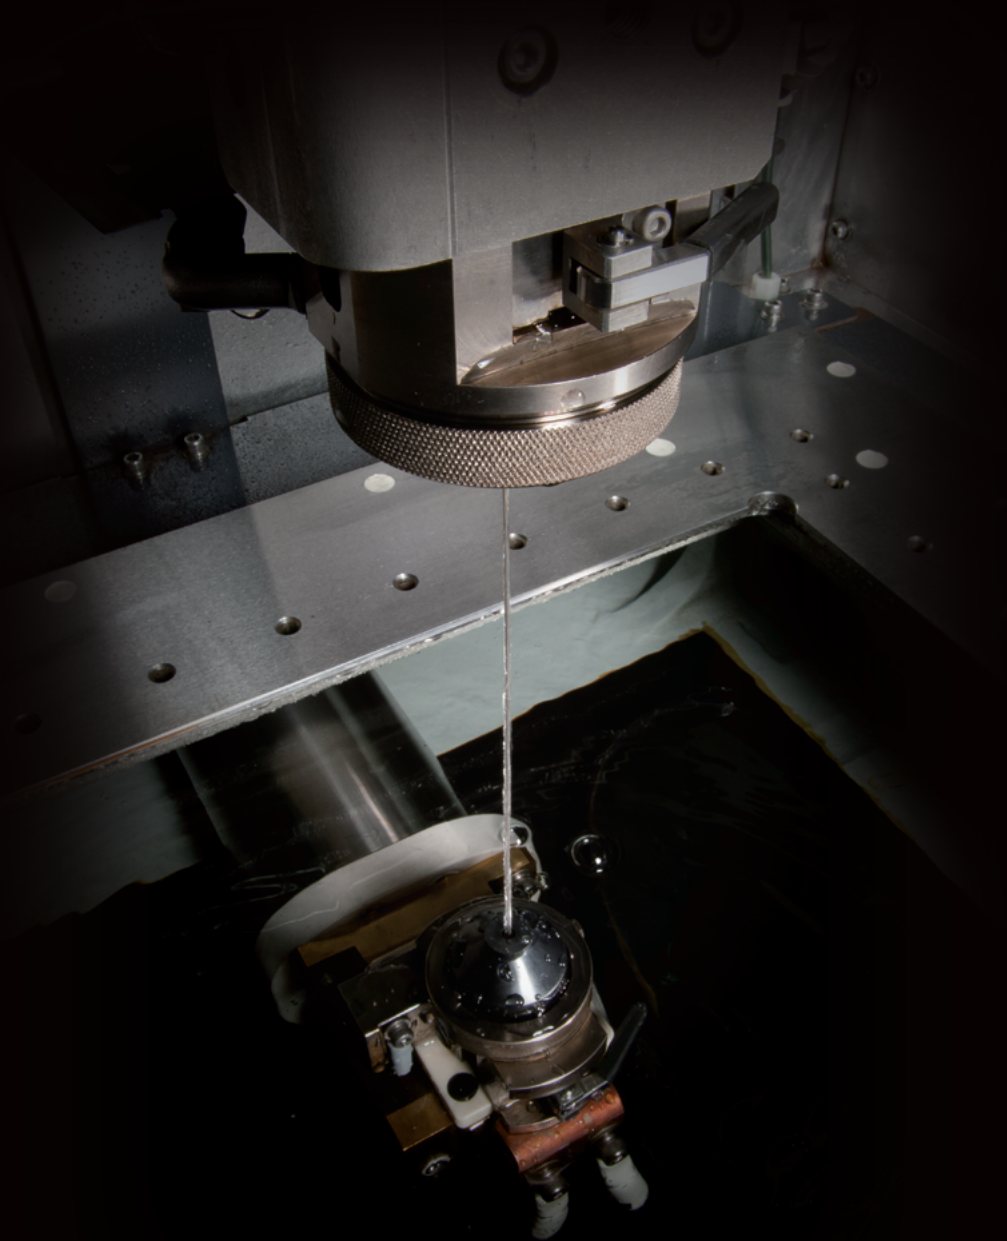


## Improved automatic wire threading


- New annealing system greatly improves wire threading with a curl ratio of less than 10%
- Wire break point insertion is greatly improved for thick workpieces
- Wire threading mode can be selected to match the workpiece shape (i.e., jet stream on, jet stream off and submerged break point insertion)
- Automatic threading time is reduced by up to 35% when using AT high-speed mode (includes one wire cut and insertion cycle)



Multiple level wire threading is possible by setting the AT jet mode to off. Highly dependable automatic threading for multi-opening applications

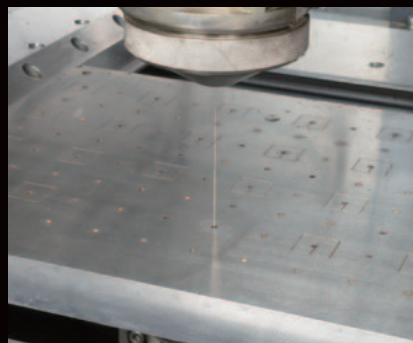

Stable automatic threading is realized during pitch machining

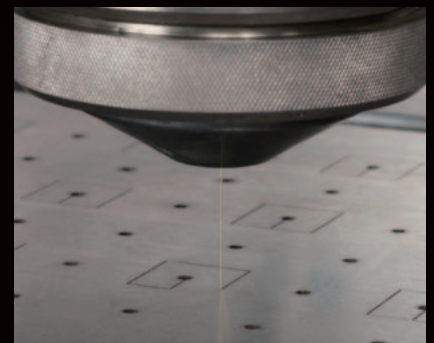


Wire break point insertion is possible

## Wire electrode annealing structure


- Improved wire annealing power supply and tension control enhance wire threading (producing a curl ratio of 10% or less), which straightens the natural curl caused by spooling
- The greatly lengthened distance of annealed wire improves automatic wire threading for thick workpieces

\*A curl ratio of less than 3% applied for the conventional model (FA Series)

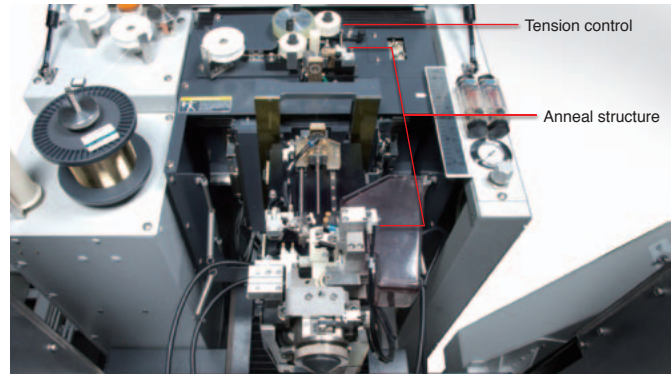

## New jet water flow mechanism

- Flow analysis simulation has been used to optimize the water flow mechanism for straightening the jet stream, which improves wire threading for thick workpieces

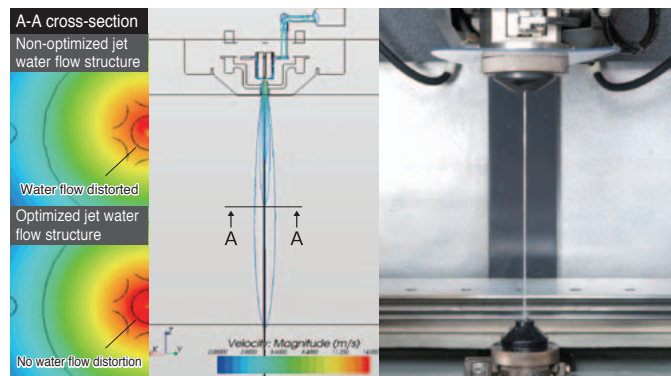

## Wire collection unit

- Broken wire collection, which clears the upper guide after a wire break, has been improved so it handles even highly curled wire without hesitation



## One-touch lever clamp mechanism

- New one-touch lever clamping system provides quick, easy and accurate power feed indexing
- The clamp lever accurately locates the power feeder with repeatable torque, unlike systems that use the set-screw method



## Wire feed wiper

- A felt wiper added to the wire path removes manufacturing impurities from the wire surface, which reduces slippage on the drive rollers



## Diamond guide


- A round diamond guide is used to provide the best accuracy for both straight and taper cutting applications
- Both upper and lower guides can be replaced by simply unscrewing the flush cups



# Opt Drive System

## Improved Machining Accuracy

Next-generation drive system and refined power-supply control technology

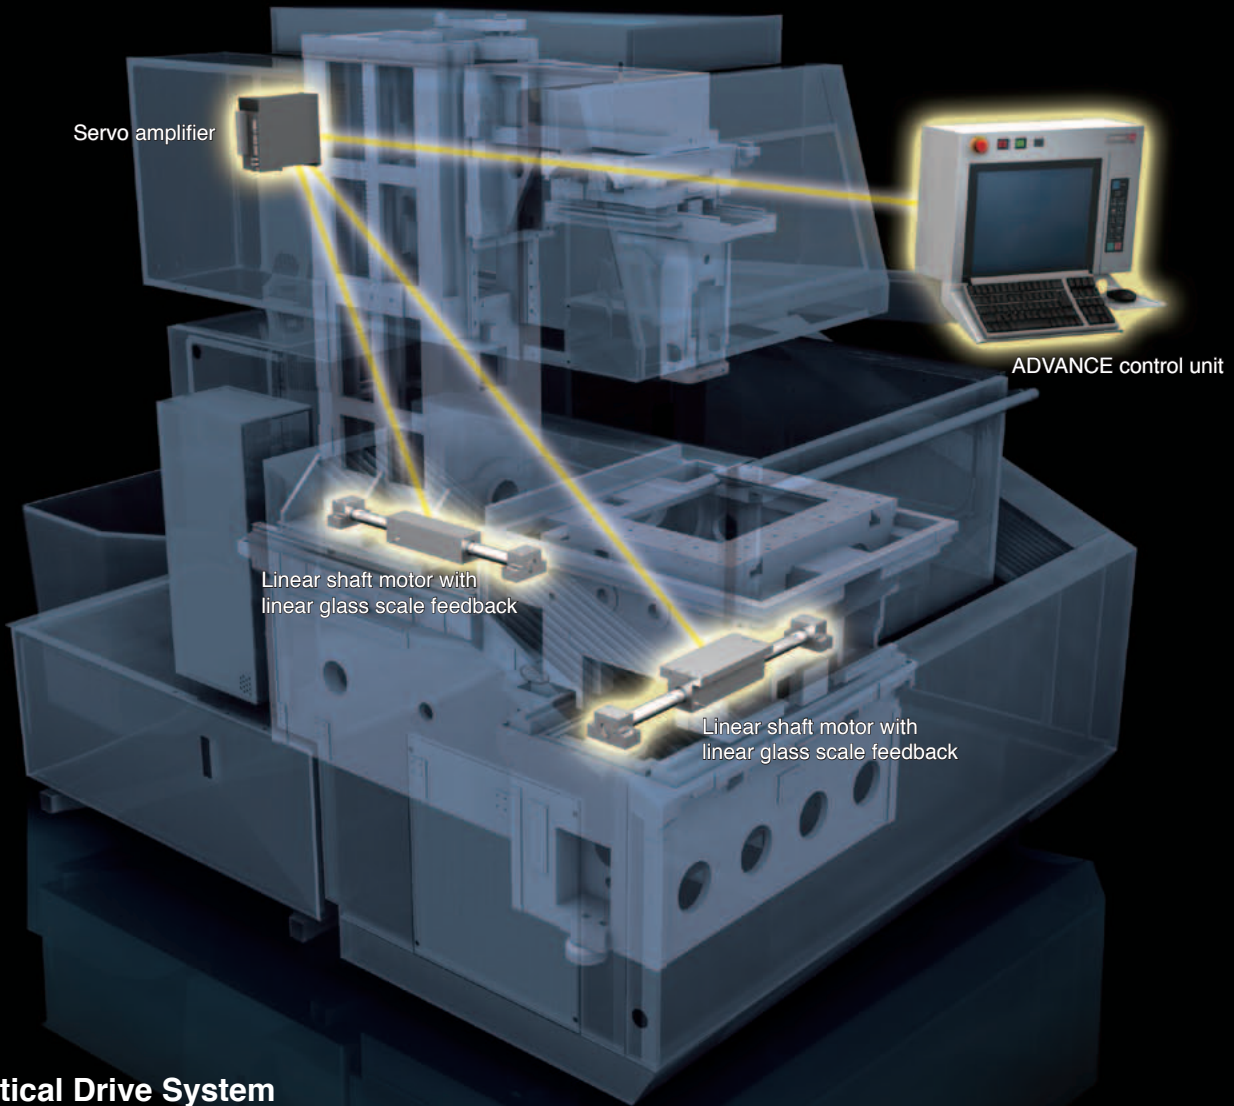


### Optical Drive System

- High-speed fiber-optic communications and a linear shaft motor synergistically improve machining accuracy
- A servo amplifier and control unit developed by Mitsubishi Electric contribute to system optimization

### Linear Shaft Motor


- Power consumption is reduced by utilizing a full 360° magnetic flux as the effective driving force
- Highly accurate axis movement is possible without any backlash
- Non contact power transmission ensures stable and accurate axis movement for many years

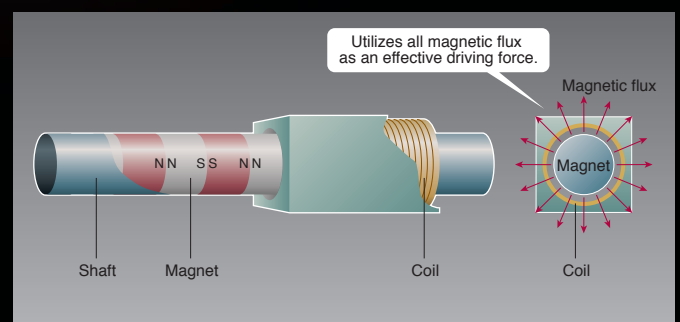




## Shape control power supply (Digital-AE II)

- Wire straightness is digitally controlled with the world's only electrical-discharge position control (As of Mar. '12)
- Total machining time is reduced by improving straightness accuracy during rough, intermediate and finishing processes

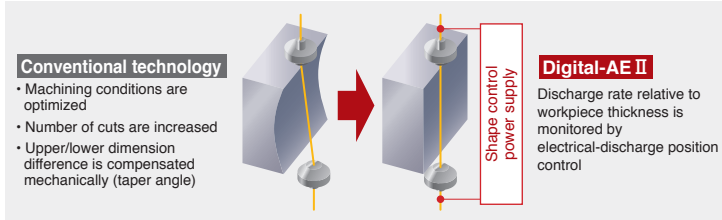

## Comparison of straightness accuracy during finish machining

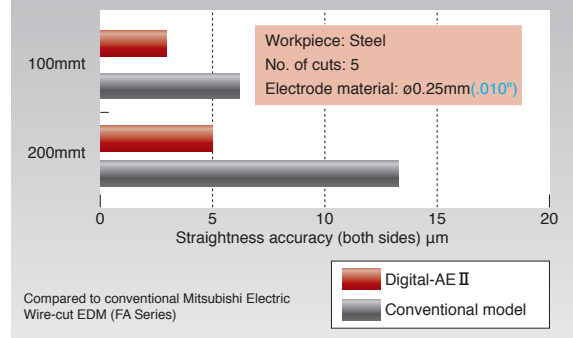


## Fully-automatic rough machining control (PM control: Power Master)

- No need to set machining conditions or have knowledge of EDM machining
- Automatically recognizes machining conditions and makes adjustments for the optimum machining condition

### <3D-PM>


- Analyzes 3D data and recognizes shape characteristics
- Eliminates transition lines which appear easily in stepped machining areas
- Improves machining speed with nozzle closing conditions

## Examples of PM machining applications

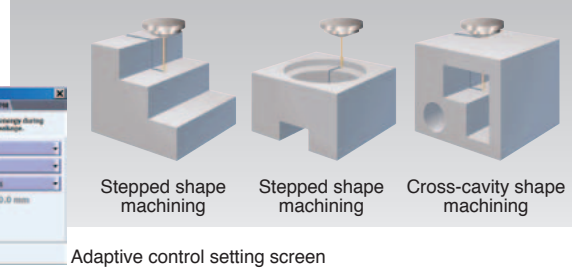


## Under-cut (dimple) reduction control (EM control: Entrance Master)

- Reduces dimples at the approach section
- Allows shape adjustment from convex to concave
- Greatly reduces polishing time

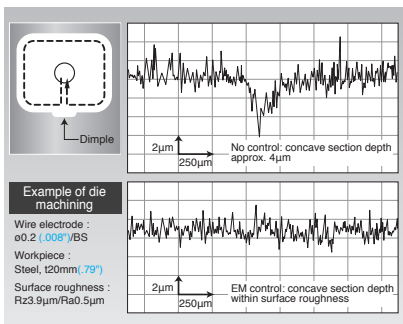


## Machining surface step/straightness control (SL control: Stepless control)

- Greatly improves the step finish and wall straightness for workpieces with varying thicknesses
- Highly accurate finishing of complicated parts

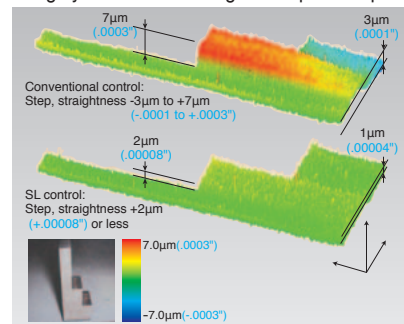

## Dimensional error control (OM control: Orbit Master)


- OM control is designed to attain a uniform electrical-discharge gap regardless of the corner shape
- This improves the radial shape error and greatly improves the total part accuracy

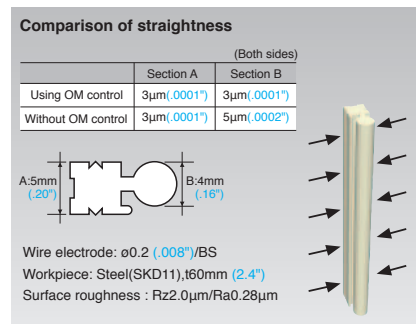

## Corner machining control (CM3 control: Corner Master3)


- Improves machining accuracy at extremely small in-corners and out-corners
- Realizes highly accurate shape machining even for complicated geometries with several types and sizes of corners
- Corner accuracy is easily controlled by the operator

Die-shaped machining samples Comparison of corner accuracies

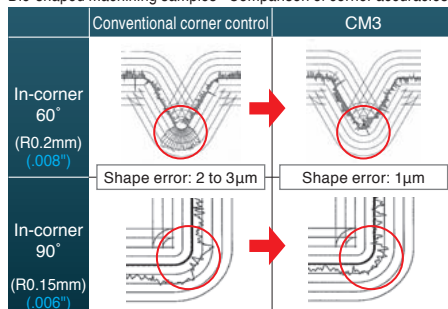

## Wire tension control (TS Master)

- Suppresses tension fluctuation for more stable machining
- Suppresses lines on the machined surface after polishing

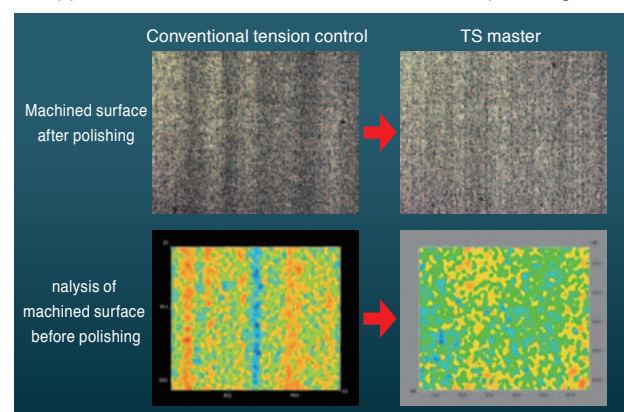


Product Line-up  
Functions and Features  
Machining Samples  
Intelligent AT  
Opt Drive System  
Precision Finish Circuit  
Natural User Interface  
Long Life System  
Revolution  
Options  
Power Supply, Control, Specifications, Machine Installation  
FA-related Products



# Precise Finish Circuit

## Improved Productivity

Wide range of technologies for ever-changing working environments


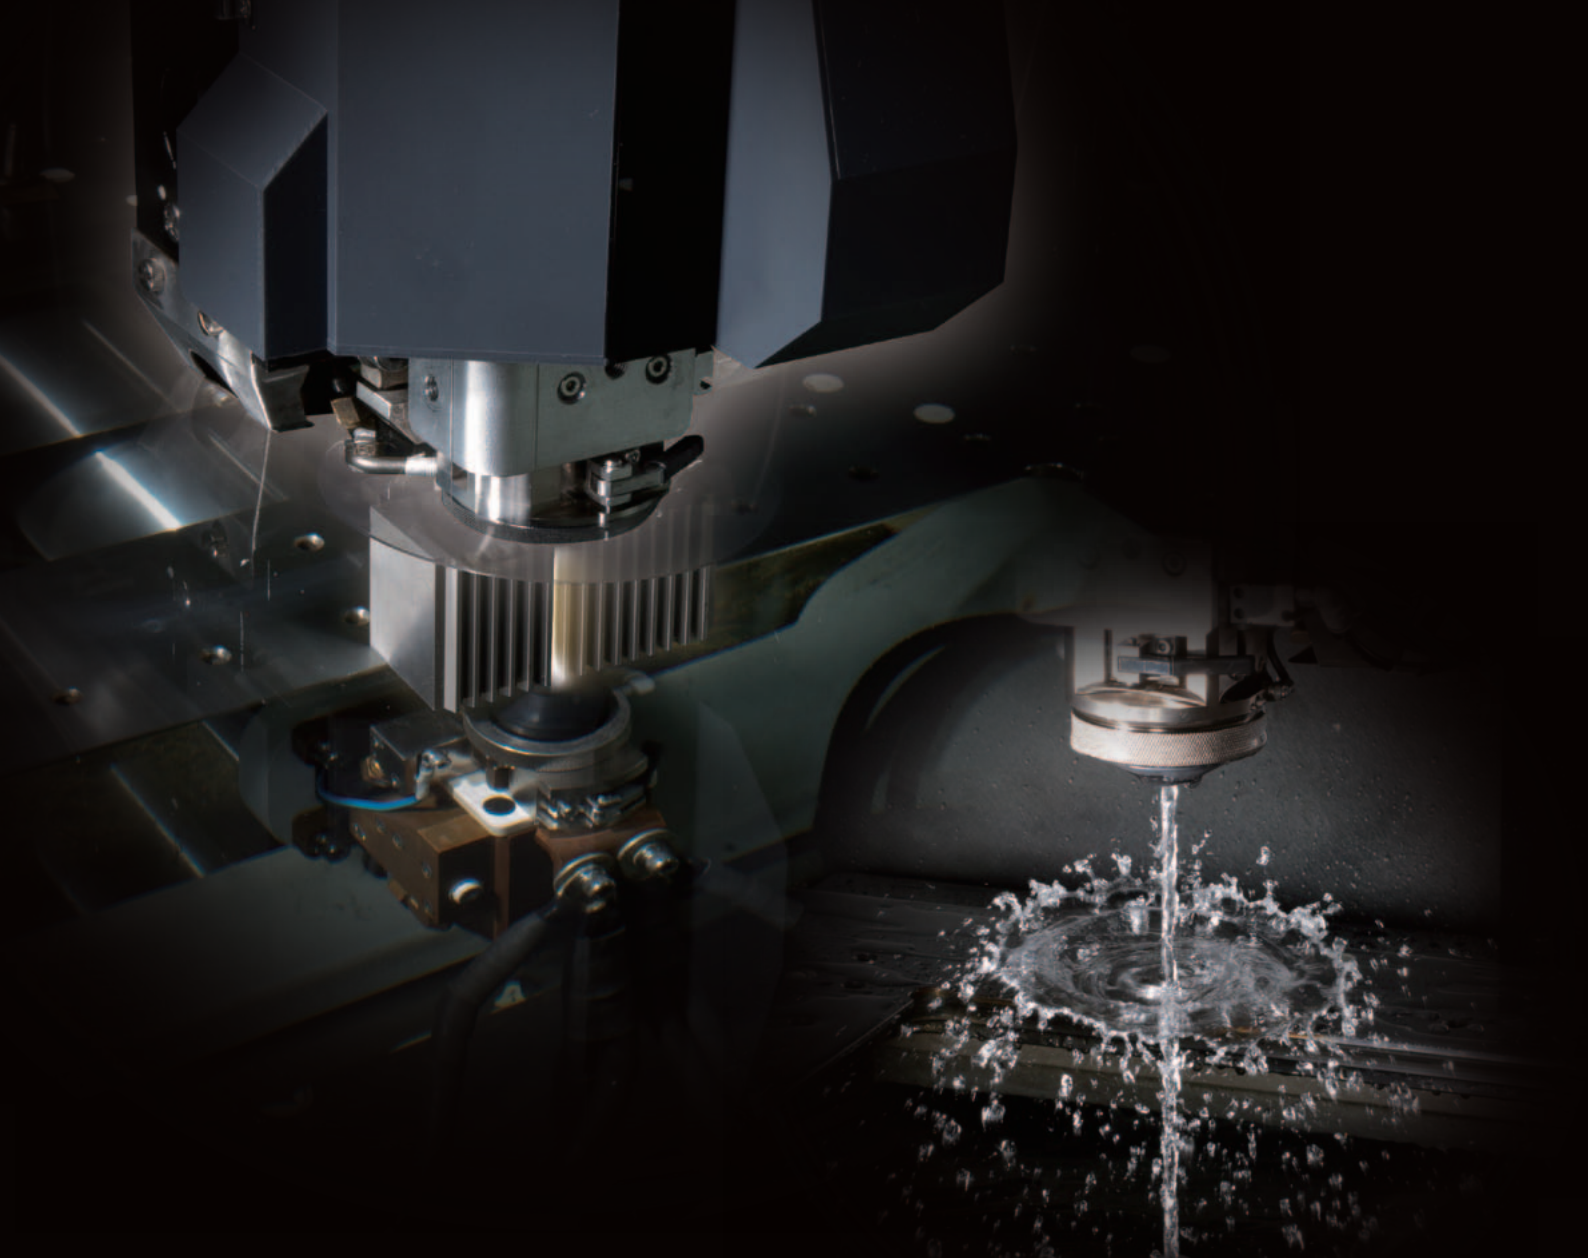


High-speed machining has been enhanced by newly improved power-supply performance for multi-pass type jobs

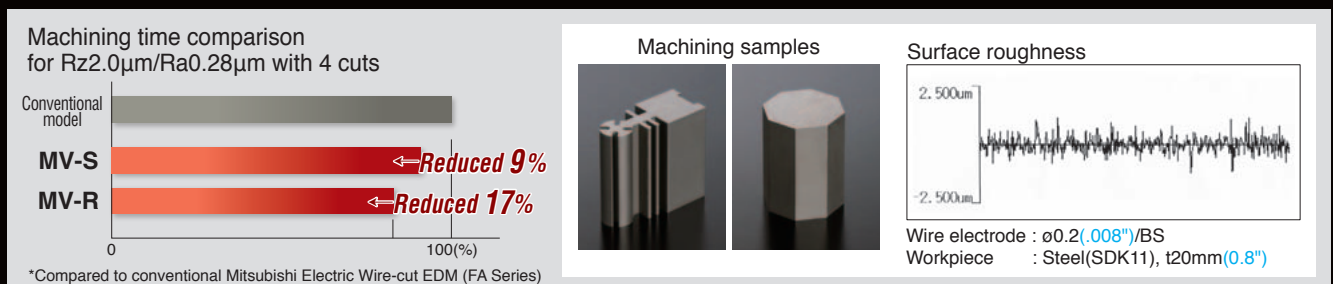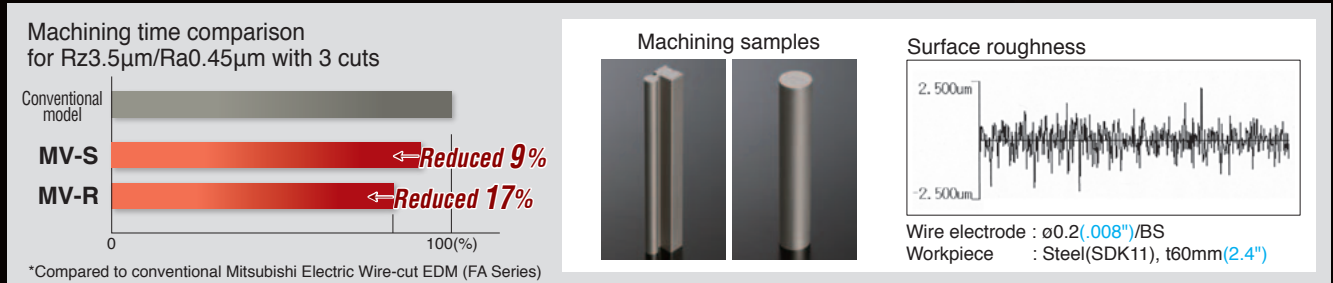


## Table insulation <MV1200R/S, MV2400R/S>

- Insulated worktable ensures improved surface finishing
- Stable machining realized when using short-pulse and low-voltage machining conditions

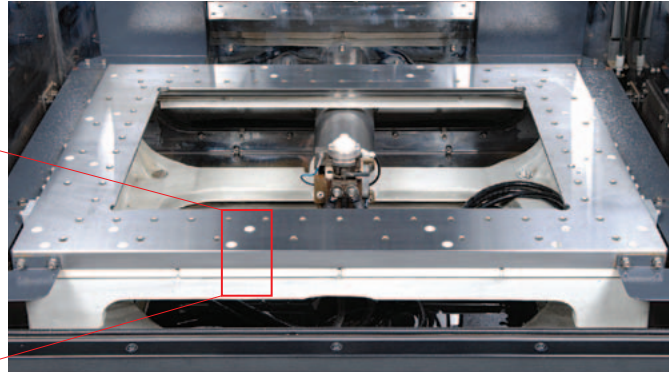

## Wire guide

- Flow analysis simulation has been used to optimize the water flow through the guide, enhancing cutting speed by improving sludge removal from the gap

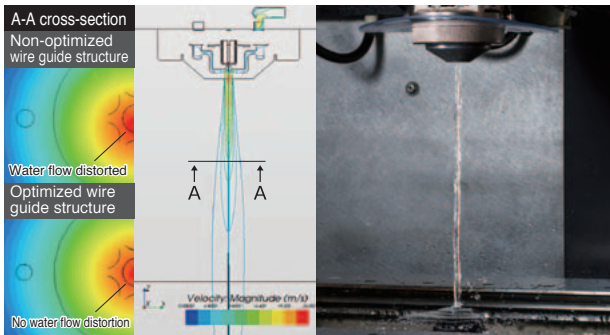

## High-speed digital control



- Spark detection speed (up to twice as fast as our conventional model) provides improved discharge efficiency and suppresses wire breakage simultaneously while improving machining speed



## High-accuracy taper machining using round dies



- Highly accurate machining of extremely small tapered sections is realized
- Uniform die edge land cuts are possible
- Angle Master Function realizes highly accurate machining of large tapered sections

- \* Angle Master guide kit is optional
- \* Max. taper angle is 45° (at max. 40(1.6")mm)

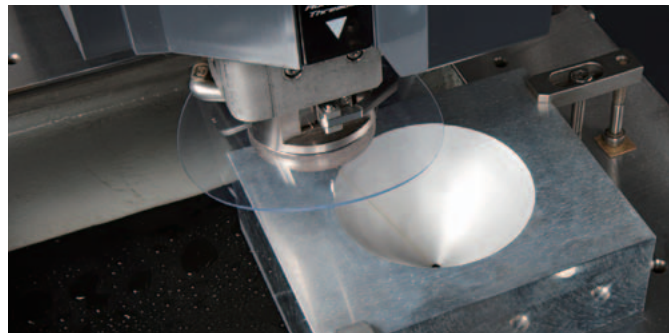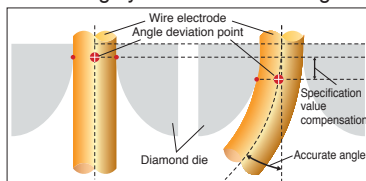

## High-speed anti-electrolysis power supply (AE power supply)

- Electrolytic corrosion is suppressed, preventing the formation of soft layers
- Compatible with all power circuits, from rough machining to finish machining
- High-speed, safe unmanned machining possible using water

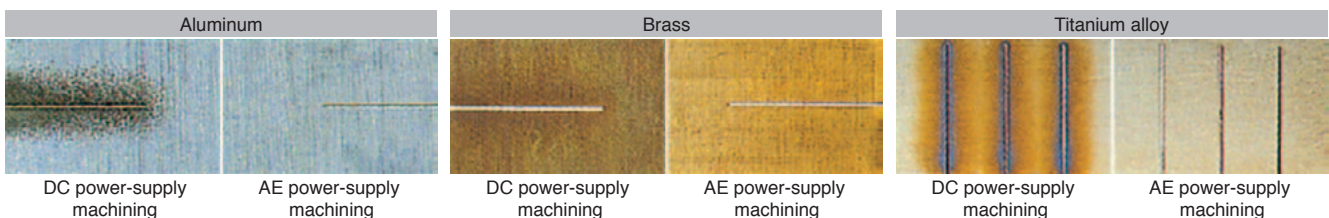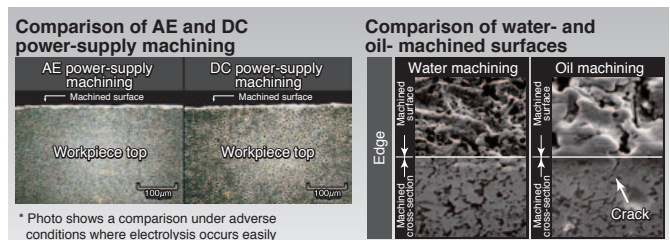

Product Line-up	Functions and Features	Machining Samples	Intelligent AT	Opt Drive System	Precise Finish Circuit	Natural User Interface	Long Life System	Revolution	Options	Power Supply Control Specifications Machine Selection	FA-related Products
-----------------	------------------------	-------------------	----------------	------------------	------------------------	------------------------	------------------	------------	---------	-------------------------------------------------------	---------------------

# Natural User Interface

## Easy Operation


User-friendly features ensure easy operation

### Ergonomic design

- User-friendly keyboard and mouse
- Easy-to-view screen (15-inch)
- Intuitive operations using touch-panel control

### Set-up screen

- Outstanding graphics supporting easy operation

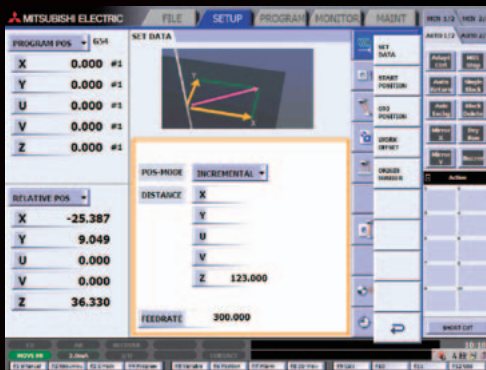

### Work piece pick-up positioning

- Highly accurate workpiece pick-up positioning is possible with the water flow on or when a workpiece is submerged




### Work alignment function

- By measuring the workpiece flatness with a dial indicator, the wire tilt can be automatically compensated to match the angle of the part, further reducing set-up time



### Machining condition search function


- Interactive operation easily creates NC data with machining condition
  - Job scheduling adjustment uses the schedule call back, extra job insertion and ME-pack feature
- \*ME-pack is a package of machining processes including offset, machining speed and adaptive control setting

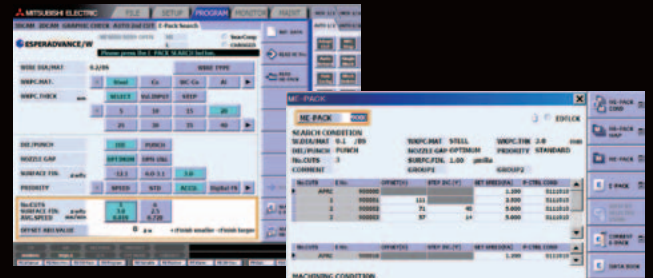

### Advanced 3D data for machine control


- Reads and displays 3D CAD data (Parasolid format \*) with a built-in 3D CAM
- Extracts 3D model contours with a built-in 3D CAM
- Creates NC data including machining conditions (ME-pack), through the built-in CAM system
- 3D-PM improves machining performance by (3D model shape analysis and optimum machining control)

\*1 Parasolid is a registered trademark of UGS PLM Solutions Co., Ltd.

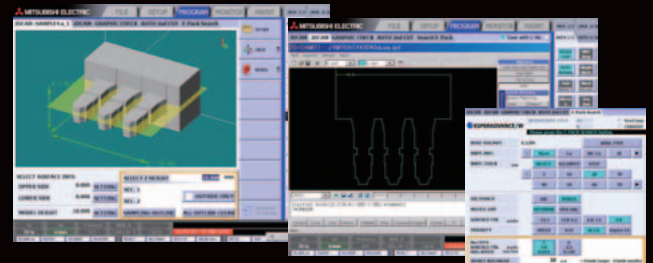

## Hardened table and all stainless steel structure

- Equipped with a hardened table
- The working tank and dielectric supply unit are made of stainless steel
- Resistant to deterioration by dielectric fluid and sludge

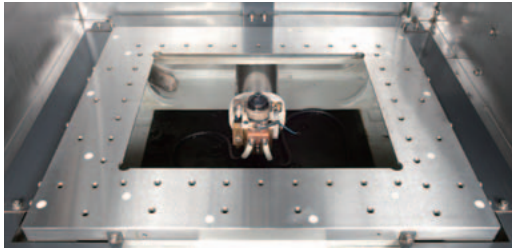

## Cleaning mechanism <MV2400R/S>

- A forced-flush self-cleaning mechanism prevents sludge from sticking to the stainless-steel seal plate



## Wire travel system

- The stability of the wire tensioning system is improved by a felt wiper and felt keeper pads that eliminate the chance of the wire jumping off the rollers



## Dielectric fluid supply unit

- A large access window into the fluid tank provides easy entry for cleaning



## Filter pressure gauge and jet cleaning nozzle

- Easily read the filter pressure
- The convenient location of the jet cleaning nozzle makes tank clean-up easy



## Wire alignment

- Highly accurate wire alignment is easy using the wire-alignment device (optional)
- Taper parameter set-up is simple using the wire-alignment device



## Precise positioning

- Highly accurate workpiece pick-up positioning is possible with the water flow on or when a workpiece is submerged



## Dielectric fluid flow meter and jet flow adjustment valve

- Dielectric flow meters are easy to read
- The adjustable jet flow valve increases the range of work that can be done




## Unit cooler filter

- Chiller air filter



## Broken wire collection box

- Conveniently located at the front for easy maintenance

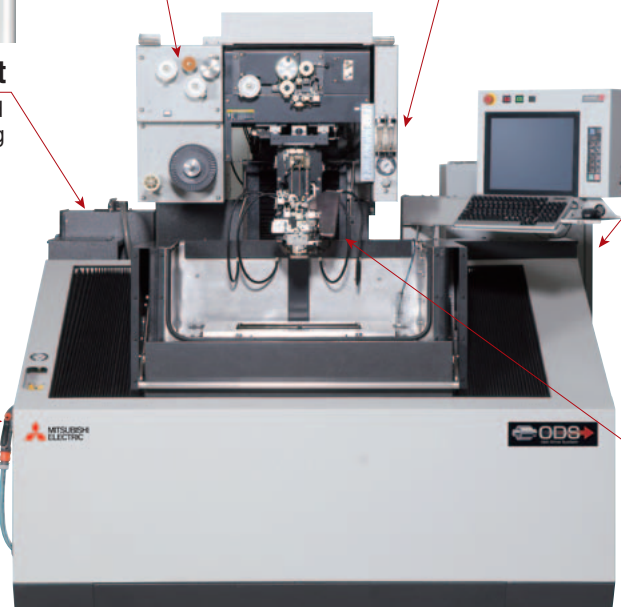


Product Line-up	Functions and Features	Machining Samples	Intelligent AT	Opt Drive System	Precise Finish Circuit	Natural User Interface	Long Life System	Revolution	Options	Power Supply, Control Specifications	FA-related Products
-----------------	------------------------	-------------------	----------------	------------------	------------------------	------------------------	------------------	------------	---------	--------------------------------------	---------------------

# Long Life System

## Energy savings, low running cost

Realizing low costs and environment-friendly operation

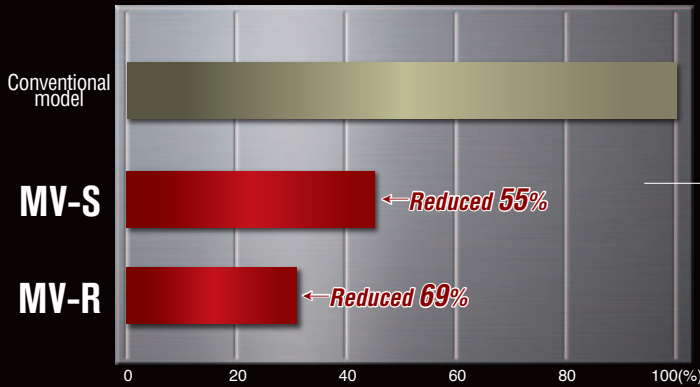


**Power consumption reduced up to 69%**


Power consumption reduced by ODS

**Filter cost reduced up to 45%**

Filter cost is reduced by changing the filtration flow rate between the rough cut and finishing processes

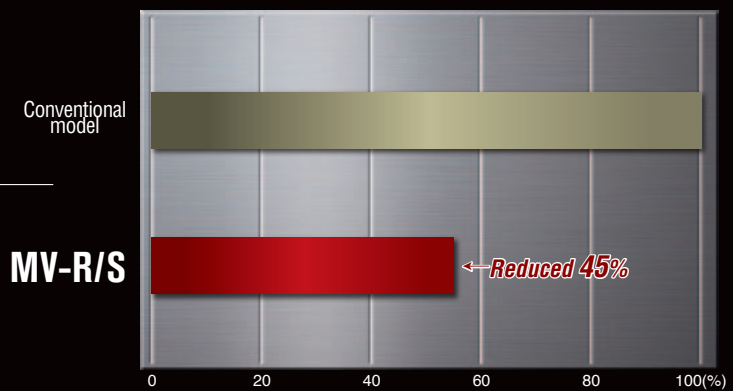

**MV-R/S**

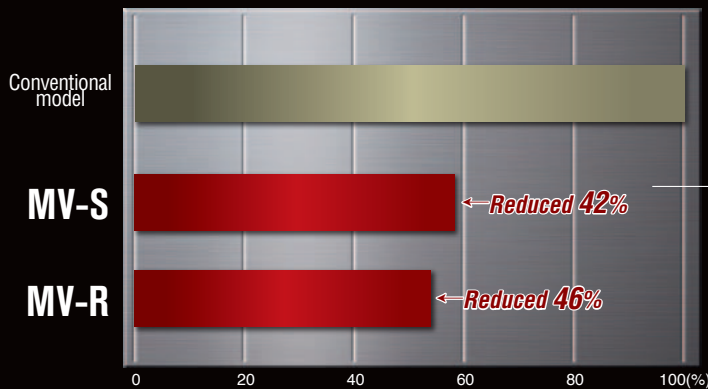


**Wire consumption reduced up to 46%**

Increased power-supply efficiency reduces the wear on the wire allowing the wire spooling rate to be reduced by PFC

**Ion exchange resin cost reduced up to 25%**

Enhanced power-supply conditions can be used with a lower fluid resistivity setting by PFC

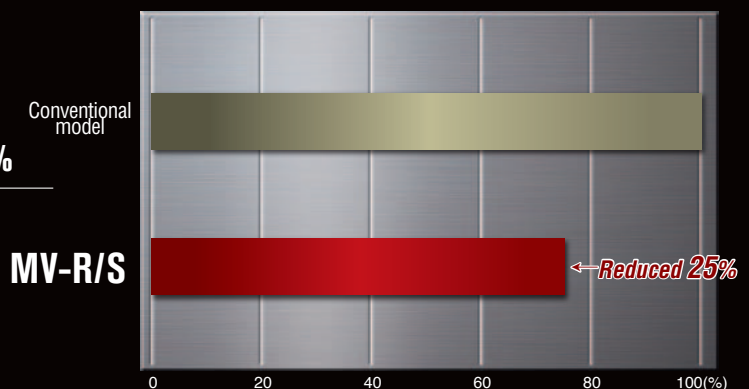


**MV-R/S**

## Running cost

- Total running cost reduced up to 42%, which is accounted for 90% by filter, ion exchange resin and power consumption




Wire electrode :  $\phi 0.2(.008)$ /BS  
 Workpiece : Steel(SKD11), t60mm(2.4")  
 Surface roughness : Rz3.5 $\mu$ m/Ra0.45 $\mu$ m

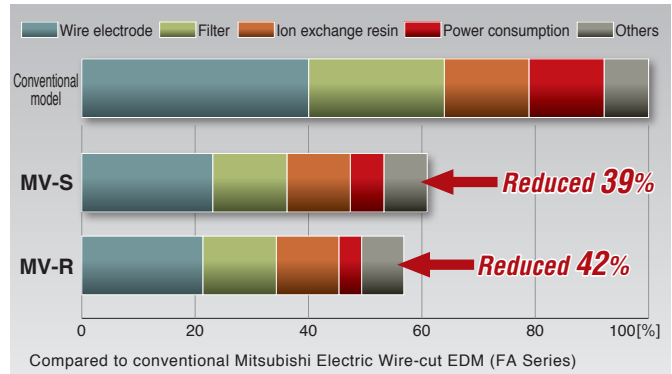


## New energy-saving mode (Sleep Mode) <MV1200R/2400R>

- The new energy-saving mode can be scheduled according to the current job ending time and start time the next day
- In Sleep Mode, the amount of energy consumed is greatly reduced as the result of using an automated pump-shut-off system
- Once the scheduled start time is reached, the system restarts the fluid system thermally, stabilizing the machine for work the next day

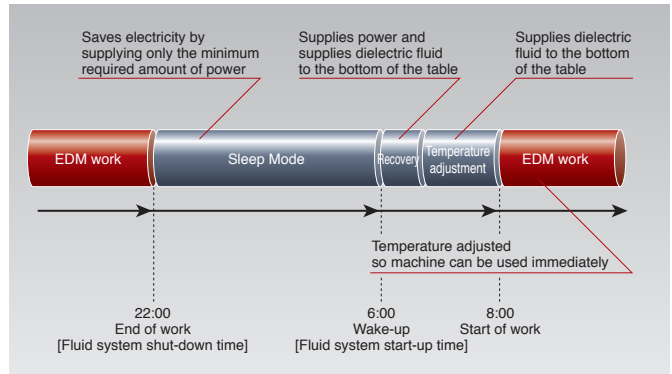


## Flat power feed terminal

- The flat shape makes it easy to index to the next location
- A total of 48 index locations can be used (24 on each side)

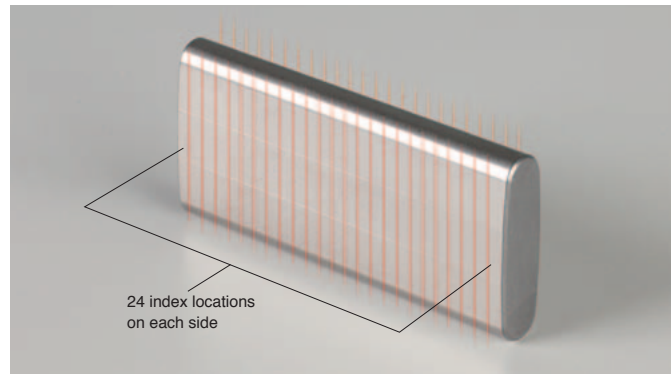


## Main tension roller

- Multiple indexing locations greatly reduce running costs

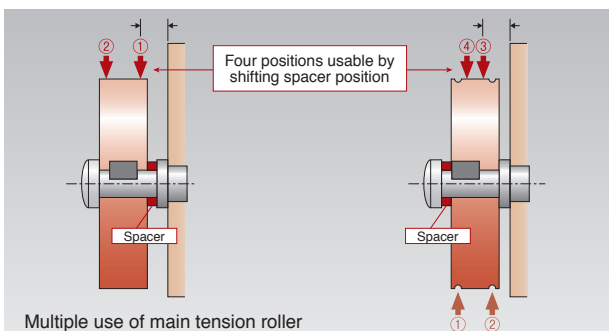

## Large-diameter collection roller

- Large collection roller with multiple index locations greatly reduces running cost

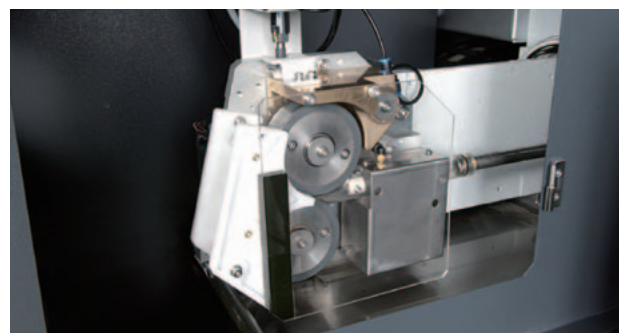

# Revolution (MV1200R/2400R)

Realizing high-value-added machining with a top ranking technology

# Revolution



ADVANCE PLUS control is standard on the MV1200R/2400R


MV1200R ADVANCE PLUS

MV2400R ADVANCE PLUS

## High-value-added functions are available on the MV1200R/2400R (option)

### φ0.05(.002"), φ0.07(.003") automatic wire threading


- φ0.05(.002") wire electrode available  
Minimum in-corner R 30μm (0.0012")
- Improved design reduces maintenance

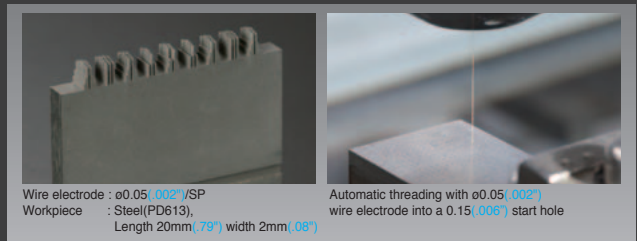

Wire electrode : φ0.05(.002")/SP  
Workpiece : Steel(PD613),  
Length 20mm(.79") width 2mm(.08")  
Automatic threading with φ0.05(.002") wire electrode into a 0.15(.006") start hole

### Digital-FS power supply


- Optimum surface roughness of Rz0.4μm/Ra0.05μm(tungsten carbide)
- Optimum surface roughness of Rz1.0μm/Ra0.12μm(steel)
- Machining with the workpiece set directly on the table (insulation jig not required)
- Machining range not limited (entire XY stroke area)

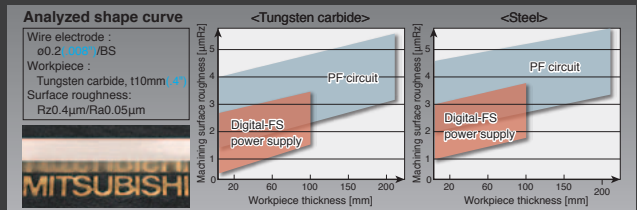

### Angle Master ADVANCE

- ODS provides high accuracy even when cutting a UV independent tapered shape
- Taper accuracy is improved regardless of wire angle direction (Taper accuracy error reduce 1/5)

\*Compared to conventional Mitsubishi Electric Wire-cut EDM (FA Series)

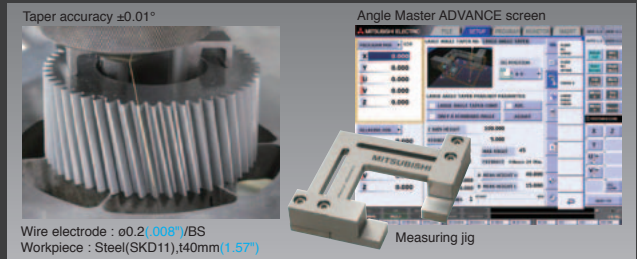


Wire electrode : φ0.2(.008")/BS  
Workpiece : Steel(SKD11), 140mm(1.57")

Measuring jig

### COREHOLD (Slug retention)

- This function allows the Slug to be automatically held in place after the rough cut for complete unattended operation
- Slug retention positions and lengths can be set by CamMagic or the built-in CAM on the machine

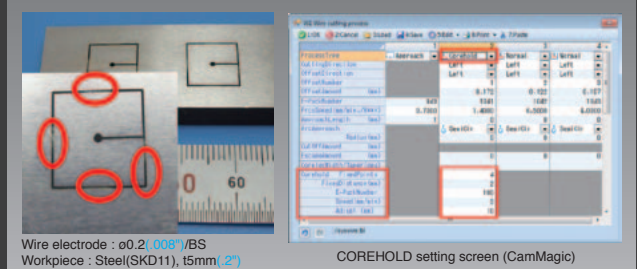


Wire electrode : φ0.2(.008")/BS  
Workpiece : Steel(SKD11), 15mm(.2")

COREHOLD setting screen (CamMagic)

### High voltage power supply (for processing-resistant materials)

- Machining speed improved for processing-resistant materials (sintered diamonds/boron nitride)

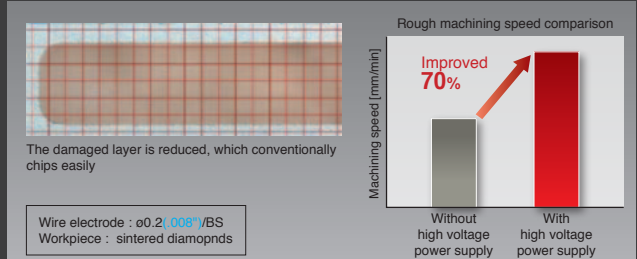

Wire electrode : φ0.2(.008")/BS  
Workpiece : sintered diamonds



# ADVANCE PLUS

(MV1200R/MV2400R)

## Improved machining speed

- New V350 V power-supply control realizes high-speed machining
- Optimized control of power-supply during intermediate and finishing processes reduces total machining time



## Machining time reduced up to 17%



Wire electrode :  $\phi 0.2$ (.008")/BS  
Workpiece : Steel(SKD11), t60mm(2.4")

Machining time comparison for Rz3.5 $\mu$ m/Ra0.45 $\mu$ m with 3 cuts

\*Compared to conventional Mitsubishi Electric Wire-cut EDM (FA Series)




## Improved corner accuracy

- ODS provides high accuracy even when cutting a U-V independent tapered shape
- Machining accuracy is improved in very small inside & outside corn radii



## Corner accuracy $\pm 1\mu$ m

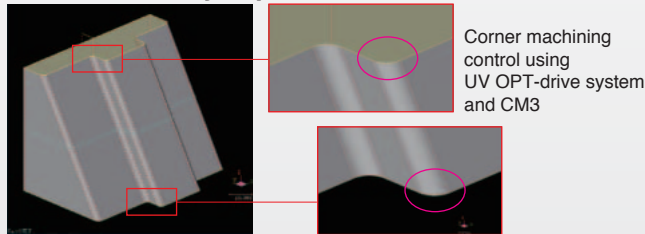

<Top surface of arbitrary shape up and down / Bottom surface of circle command>

## Improved circular accuracy

- Compensation accuracy improved by new AFC III servo control



## Circular accuracy within 2 $\mu$ m



Wire electrode :  $\phi 0.2$ (.008")/BS  
Workpiece : Steel(SKD11), t30mm(1.2")

## Energy savings

- Energy consumption is reduced according to the current job ending time and the next days starting time (Sleep Mode)



## Power consumption reduced up to 69%



\*Compared to conventional Mitsubishi Electric Wire-cut EDM (FA Series)


## Security

- Anti-virus protection is provided as standard by one of the world leaders in security control
- Pattern file can be used semi-permanently without renewal



McAfee is a registered trademark of McAfee, Inc. in the United States and other countries

## Defends machines against the threat of computer viruses (LAN, USB)

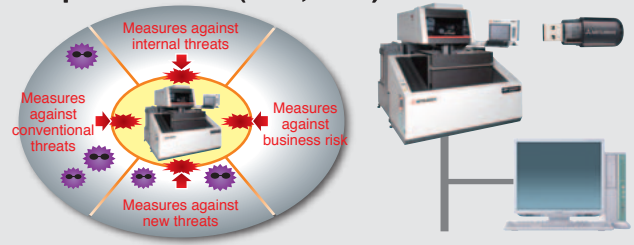

Product Line-up

Functions and Features

Machining Samples

Intelligent AT

Opt Drive System

Precise Finish Circuit

Natural User Interface

Long Life System


Revolution

Options


Power Supply, Control Specifications, Machine Installation

FA-related Products


# Options

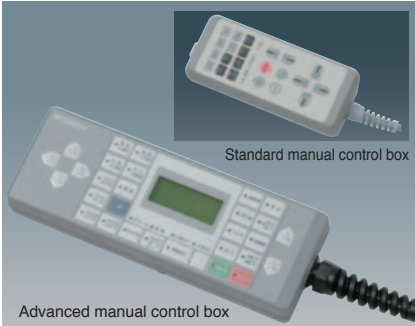

Standard manual control box  
Advanced manual control box  
**Advanced manual control box / Standard manual control box**  
The advanced manual control box has an LCD display, and can be used for positioning, zero set and AT operations

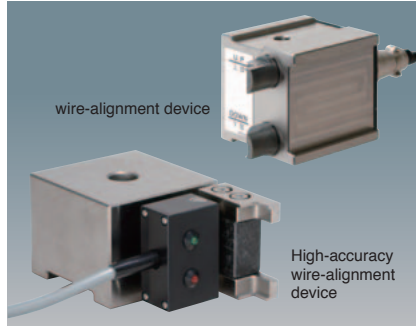

wire-alignment device  
High-accuracy wire-alignment device  
**High-accuracy wire-alignment device / wire-alignment device**  
This device aligns the wire electrode with the table

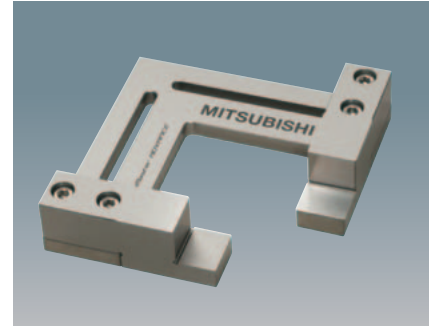


**Angle Master ADVANCE (jig)**  
Measuring jig to be used for Angle Master ADVANCE (S/W)  
Use for taper degree calculation in UV axis directions



**Angle Master guide kit**  
Max. 45° tapered machining possible using dedicated diamond guide



**20kg(44.1lb) wire spool unit**  
Long-time continuous machining is possible

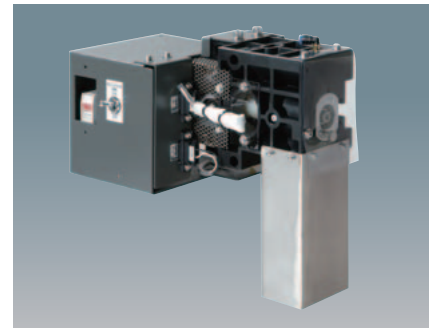

**Wire processing unit**  
Spent wire electrode is cut at the discharge section



**4-piece filter system**  
4-piece filter specifications reduce filter replacement frequency



**3-color warning light**  
Indicates machine operating status



**Run timer**  
Indicates accumulated machining time



**LED light**  
High-brightness LED lighting



**Workpiece clamp set**  
Clamp jigs dedicated for use in holding workpieces



**Tools (tool box)**

Options and retrofit specifications differ according to country and region; please contact a Mitsubishi Electric representative for details.


◎ : Standard equipment ○ : Can be retrofitted ● : Factory installation only × : Not available

Option name	MV1200R	MV1200S	MV2400R	MV2400S	MV2400S (column up specification)	MV4800
Machine unit	UV OPT-drive system specifications	◎	×	◎	×	×
	ø0.05 (.002"), ø0.07 (.003") automatic wire threading*1	●	×	●	×	×
	Wire processing unit *1	○	○	○	○	○
	20kg (44.1lb) wire spool unit	○	○	○	○	○
	50kg (110.2lb) wire spool unit	×	×	×	×	○
	Advanced manual control box (with axis display)	○	○	○	○	○
	Supporting table	×	×	×	×	○
Power supply	Digital-FS power supply	●	×	●	×	×
	High voltage power supply (for processing-resistant materials)	●	×	●	×	×
Dielectric fluid system	Ion exchange resin 10L (0.4cu.ft.) specifications (Organo)	○	○	○	○	○
	Ion exchange resin 20L (0.7cu.ft.) specifications (Organo)	○	○	○	○	○
	4-piece filter system	×	×	○	○	◎
Communications	External signal output*3	○	○	○	○	○
	LAN/W*4	◎	◎	◎	◎	◎
	DNC	○	○	○	○	○
	FTP	○	○	○	○	○
Taper machining	Angle Master guide kit ø0.2 (.008") (±30°) *5	○	○	○	○	○
	Angle Master guide kit ø0.2 (.008") (±45°) *5	○	○	○	○	○
	Angle Master guide kit ø0.25 (.01") (±30°) *5	○	○	○	○	○
	Angle Master guide kit ø0.25 (.01") (±45°) *5	○	○	○	○	○
	Angle Master (S/W) *6	◎	◎	◎	◎	◎
	Angle Master ADVANCE (S/W) *2	○	×	○	×	○
Software	Angle Master ADVANCE (measuring jig) *2	○	×	○	×	○
	Anti-virus protection	◎	○	◎	○	○
	Sleep mode	◎	×	◎	×	◎
Display	COREHOLD	○	×	○	×	×
	3-color warning light*3	○	○	○	○	○
	Run timer*3	○	○	○	○	○
Others	Option box*6	○	○	○	○	○
	Instruction manual (paper edition)	○	○	○	○	○
	LED light	○	○	○	○	○
	Wire-alignment device	○	○	○	○	○
	High-accuracy wire-alignment device	○	○	○	○	○
	Tools (tool box)	○	○	○	○	○
Workpiece clamp set	○	○	○	○	○	

\*1 The ø0.05 (.002") to ø0.15 (.006") wire electrodes cannot be used with the wire processing unit. (These sizes can be used with the continuous wire feeder after removing the wire processing unit.)  
 \*2 Angle Master ADVANCE (measuring jig) is needed for using Angle Master ADVANCE (S/W).  
 \*3 Option box is needed  
 \*4 LAN cable should be all straight wiring type with shielding connector, category 5 (100BASE-TX compliant), STP (four shielded twist pair). A switchable hub that can ground the shielded LAN cable should be used.  
 \*5 Standard diamond guide and nozzle (ø7(.28")) is used for taper machining of 15 degrees or less. Angle Master guide kit (H/W) is needed for taper machining of 15 degrees or more (wire electrode for taper machining should be used).  
 \*6 Necessary for mounting external signal output, 3-color warning light and run timer.

## Wire-cut EDM automation system

- Accumulates workpiece measurement data
- Compatible for external set-up using a coordinate measuring machine
- Enables automatic measurement when measuring on an EDM
- Creates processes offline
- Automatically exchanges workpieces using a robot

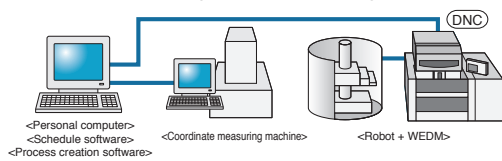

\* Please contact a Mitsubishi Electric representative for details.

## Network connection specifications (DNC, FTP Options)

Data, such as NC programs, machining conditions and variables can be exchanged between a personal computer and EDM. The required options differ according to the models and purpose, and can be confirmed using the following table. One IP address must be prepared for each EDM within the user's in-house network.

Required specifications	Image drawing	Required option	Supplement
Operate on the EDM side and receive data from personal computer.	Data transmission	LAN/W (standard)	Use EDM's Explorer and receive data in the common HDD on the EDM side. After that, data I/O operations are required.
Operate on the EDM side and send data directly to the EDM's NC data area.	Data transmission	FTP	Data can be received only using data I/O operation.
Operate on the personal computer side and send data to the EDM.	Data transmission	LAN/W (standard)	The personal computer's Explorer and the EDM's common HDD are used. After that, data I/O operations are required for the EDM.
Operate on the personal computer side and send data directly to the EDM's NC data area.	Data transmission	DNC	Commercially available DNC software must be installed on the personal computer side. Refer to DNC specifications operation for details.

Product Line-up

Functions and Features

Machining Samples

Intelligent AT

Opt Drive System

Precise Finish Circuit

Natural User Interface

Long Life System

Revolution

Options

Power Supply, Control Specifications, Machine Installation

FA-related Products

# Power Supply, Control Specifications/Machine Installation

## Power supply/Control unit specifications

Compatible model		MV1200R	MV1200S	MV2400R (column up specification)	MV2400S
Power supply unit specifications					
Power supply unit	Model	WMV(R)	WMV(S)	WMV(R)	WMV(S)
	Power supply circuit	Regenerative transistor pulse type			
	Cooling method	Completely sealed/Indirect cooling			
	Anti-electrolytic power supply	All modes			
	Maximum output current	50A			
	Power supply mode	9 types : Anti-electrolysis power supply			
	Machine voltage selection	16 types			
	Machining setting	44 types			
	OFF time	36 types			
	Stabilization circuit A	10 types			
	Stabilization circuit B	20 types			
	Stabilization circuit C	7 types			
	Stabilization circuit E	5 types			
	FM circuit (LA, LC)	2 types			
PM control	3 notches (changeable with M code or screen) • Workpiece material: Steel, tungsten, copper, aluminum • Applicable only for rough-cut conditions				
AVR	Built-in				
Unit dimensions (mm) (in)	600 × 650 × 1765 (23.6 × 25.6 × 69.5)				
Unit weight (kg) (lb)	240 (529)				
Control unit specifications					
Control unit	Model	W31MV-2(R)	W31MV-2(S)	W31MV-2(R)	W31MV-2(S)
	NC program input method	Keyboard, USB flash memory, Ethernet			
	Pointing device	Touch panel, mouse			
	Display	15" color TFT			
	Display characters	Alphanumeric characters			
	Control method	CNC closed loop			
	Number of control axes	Max. 4 axes simultaneously			
	Setting unit	X, Y, U, V, Z ... 1/0.1μm			
	Minimum driving unit (mm) (in)	50nm (0.000050mm (0.000002"))			
	Max. command value	±99999.999mm			
	Position command format	Combined use of increment/absolute values			
	Interpolation function	Linear, circular, and spiral			
	Scale magnification	0.00001 ~ 99.999999 (G code) 0.001 ~ 9999.999 (S code)			
	Optimum feed control	Automatic selection of machining speed according to gap voltage sensing			
	Path-retrace control	Reverse path retrace during short-circuit			
	Wire offset	±99999.999mm Offset numbers: 1 to 900 (intersection point calculation)			
	Basic screen menu	5 types (file, setup, machining support, monitor, maintenance)			
	Automatic 2nd cut	Interactive screen method			
	Machining condition (E-pack) storage	1 to 6999			
	Program number command	1 to 99999999			
	Sub-program	Nesting level 30			
	Sequence numbers	1 to 99999			
	Manual input positioning	Input on screen			
	Manual operation box	High-speed, medium-speed, low-speed, ultra-slow speed, inching (0.0001mm/0.0005mm/0.001mm) Positioning function, AT function			
	Graphics	XY plane, XY-XZ plane, solid, table scaling, 3D model display, background drawing, automatic machining path drawing			
	User memory capacity	1GB			
	Maintenance function	Management of consumable parts (time display)			
Adaptive control	SL, CM, EM, OM, PM, BM				
External dimensions (mm) (in)	494 × 175 × 346 (19.4 × 6.9 × 13.6) (excluding keyboard and mouse pad)				
Weight (kg) (lb)	20 (44)				

## Control unit functions

W31 (ADVANCE control unit) control unit functions					
Year, month, date display	Reference block	Program no. designation	Automatic 2nd cut	Axis exchange	Automatic taper degree calculation
Overlap window function	Single block		Machining condition search	Mirror image	Status recording
Character string replacement function	Dry run	Expanded AT function	Block delete	Circumference calculation	Data variable operation
Geometric function	Automatic return	Graphics (drawing monitor)	USB flash memory	Backlash compensation	Alarm display
Floating decimal point function	User macro	Graphics (program check)	e-manual (electronic instruction manual)	Pitch error compensation	Machining time estimate
Control command	Automatic positioning (hole center, edge)	Graphics (automatic machining shape drawing)	Repeated positioning	Soft limit (inside/outside prohibit)	Built-in 2D-CAD/CAM
Corner R	Automatic zero point return	Graphics (surface display)	Automatic power failure recovery	Wire consumption estimate	Built-in 3D-CAM
Corner chamfer	Machining start hole return	Offset	Workpiece coordinate system (106 items)	CM3 control	EM control
Linear angle command	Memory operation 1GB	Coordinate reading	PM control	OM control	3D model compatible PM control (3D-PM)
30-sec. short-circuit stop	Program edit	Time reading	SL control	3D viewer (Parasolid data display)	Digital-AE II
Simultaneous 2-axis wire alignment	Coordinate rotation (K)	XY-axis independent scaling	3D graphic check	Sleep mode (MV-R)	
Workpiece inclination compensation	Pattern rotation (S)	Axis rotation (AR)	Workpiece alignment	Maintenance check	

## Machine installation checklist

### Determining the machining details

Check each item, and make sure that no item or order is overlooked.

1) Determine the workpiece	
2) Determine the machining site	
3) Determine the pre-processing site	
4) Determine the post-processing site	

### Preparation of installation fixtures

1) Plan the installation fixtures	
2) Prepare or manufacture the fixtures	

### Preparation of consumable parts

1) Purchase consumable parts such as wire electrodes	
------------------------------------------------------	--

### Training of programmers and operators

1) Select the programmers and operators	
2) Apply for training seminars	

### Confirmation of foundation and power-supply work

If there is any possibility of radio disturbance, investigate it prior to starting work.

1) Confirmation of floor area	
2) Confirmation of environment (constant-temperature dust-proof room, measure for radio disturbance, prevention of external noise)	
3) Confirmation of foundation floor	
4) Foundation work	
5) Primary wiring for power lead-in	
6) Grounding work	
7) Construction of dielectric fluid (city water) supply/drainage facilities	
8) Air piping work	

### Confirmation of delivery path

Check the path inside and outside the factory to avoid any trouble during delivery.

1) Traffic restrictions to factory	
Road width	
Entry road	
2) Factory entrance and width of gate in factory (m)	
Factory building entrance dimensions (height x width) (m)	
3) Constant-temperature dust-proof room entrance dimensions (height x width) (m)	

#### Cautions

The standard delivery entrance dimensions for standard shipment delivery are given on the product line-up page. If the entrance is smaller than the standard delivery entrance, a machine with different dimensions can be shipped. \* Please contact a Mitsubishi Electric representative for details (a separate estimate will be issued). Note that delivery may not be possible in some cases depending on the dimensions.

## Installation conditions

### 1. Installation site

- Constant-temperature dust-proof room
  - Recommended room temperature 20±1°C (68°F±2)
  - Usable temperature range 5 to 35°C (44°F to 95°F)

Temperature fluctuation will directly affect machine accuracy. To maintain performance accuracy, select a place with minimal temperature fluctuation. Install the EDM in a constant-temperature room when performing high precision machining, even when using skim cuts.

Note that an environment where the temperature fluctuates by 3°C (5°F) or more within 24 hours, or 1°C (2°F) or more within one hour can adversely affect machining accuracy. Make sure that the machine body is not subject to direct wind from air-conditioners or to direct sunlight.
- Dust-free location is recommended. Install a wire-cut EDM in an environment with no corrosive gases, such as acid or salt, or mist, and with low levels of dust. Grinding dust can adversely affect the machine's linear scales and ball screws. Pay special attention to installation location to avoid this hazard (separate from grinding machine, or install in separate room, etc.).
- Humidity Within 30 to 75%RH (with no dew condensation).
- Temperature range during transportation and storage -25 to 55°C (13°F to 131°F) (when power is not connected).

- Tolerable vibration of floor
  - Select a floor where vibration or impact will not be conveyed.
  - As a reference, the vibration level should have a max. amplitude of 2µm or less at a 10 to 20Hz frequency.
  - Consult with the contractor or vibration measuring instrument manufacturer for details on the measuring method.
- Foundation
  - The floor should be concrete with a thickness of 400mm (15.7") or more so it can sufficiently withstand the system's weight.
  - The floor inclination (step) must be within 6/1000 (floor inclination 6mm per 1m) (MV2400 Series).

### 2. Machining heating value

Use the equipment capacity to calculate the wire-cut EDM's heating value required for designing a constant-temperature room.

$$\begin{aligned} \text{Heating value (kW)} &= \text{Equipment capacity (kVA)} \times 0.6 \\ &= 13.5\text{kVA} \times 0.6 \\ &= 8.1\text{kW} \end{aligned}$$


The above value is a guideline. Consult with the constant-temperature room manufacturer for details.

### 3. Power-supply equipment

- Primary wiring 3-phase 200/220VAC±10% 60Hz, 3-phase 200VAC±10% 50Hz
  - Power capacity 10.0kVA (during normal use) (when using Ø0.2(.008")mm wire electrode) 13.5kVA (when using the maximum)
- \* Use a 14mm<sup>2</sup> or thicker cable for the primary connection.

### 4. Grounding work

- Wire-cut EDMs must always be grounded to prevent external noise, radio disturbance and earth leakage.
- Install a wire-cut EDM in an environment with no corrosive gases, such as acid or salt, or mist, and with low levels of dust.
- Common grounding can be used if noise from other devices will not enter through the common grounding; the grounding cable must be connected independently to the grounding location (Fig. 2).
  - Use a 14mm<sup>2</sup> grounding wire.

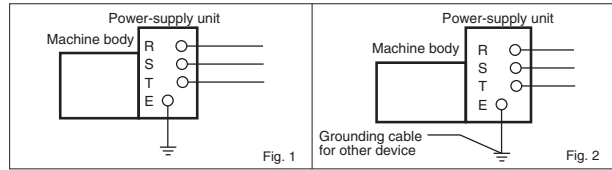


### 5. Primary air equipment

- Hose diameter : 1/4 hose (hose sleeve outer diameter: ø9.0 (0.35"))
  - Pressure : 0.5 to 0.7MPa (70 to 100psi)
  - Flow rate : 75ℓ/min or more (26cu.ft./min.)
- \* Air (compressed air) is used to operate the automatic wire feeder and work tank door, etc. Air supplied from a normal compressor contains various impurities that could cause operation faults if they get into the pneumatic devices such as the solenoid valve. Install an air filter with a drainage discharge mechanism, etc., in the air source (primary source) piping to prevent impurities from entering the pneumatic devices.

### 6. Shield room

Install a shield room if a wire-cut EDM affects televisions or other communication facilities in the area. Observe the following points when installing the wire-cut EDM in the shield room.

- Ground the wire-cut EDM in the shield room (Fig. 3).
- If the wire-cut EDM cannot be grounded in the shield room, connect the wire-cut EDM's grounding cable to the shield room's grounding terminal (through bolt) as shown in Fig. 4.
- Consult with a Mitsubishi Electric representative for details on installing a shield room.

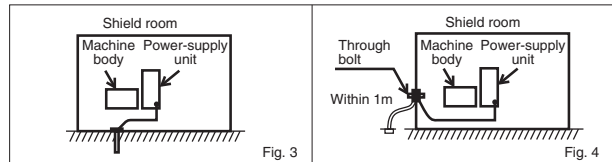

## Precautions for selecting earth-leakage breaker

To prevent malfunctions caused by the external noise from control units, etc., a filter is installed for the power-supply input. By grounding one end of this filter, an earth-leakage current of approx. 30 to 40mA passes through the filter. A highly sensitive earth-leakage breaker (sensitivity current 30mA) could malfunction. Thus, a medium-sensitivity earth-leakage breaker (sensitivity current 100 to 200mA) is recommended for the wire-cut EDM. Class C grounding (grounding resistance of 10Ω or less) is recommended for the wire-cut EDM. Even if the sensitivity current is 200mA, the contact voltage will be 2V or less, and no problems will occur in preventing electric shock (application of tolerable contact current Class 2, 25V or less).

## Disposal

The dielectric fluid, dielectric fluid filter, ion exchange resin, wire, etc., are industrial waste. These must be disposed of following national and local laws and ordinances.

## Harmonic distortion

If there is harmonic distortion in the power supply, the machine operation could be affected even if the voltage does not fluctuate. In addition, the harmonic current could flow from the wire-cut EDM to the power system and adversely affect peripheral devices. If the effect of the harmonic distortion causes problems, install a harmonic suppression filter or take other measures.

## Wire electrodes

Use the following wire electrodes

OB-PN (ø0.1/BS - ø0.3/BS)	Oki Electric Cable
HBZ-U(N) (ø0.1/BS - ø0.3/BS)	Hitachi cable
SBS-HN (ø0.1/BS - ø0.3/BS)	Sumiden Fine Conductors
SWP-SP (ø0.05/SP - ø0.07/SP)	Suzuki Metal Industry

\*The wire electrodes shown above do not guarantee performance

## Recommended sliding surface lubricants

Use one of the following lubricants for sliding surface As of March 2014

Manufacturer	Product name
Exxon Mobil	Mobil DTE26
Idemitsu Kosan	Super Hydro 68A
Showa Shell	Terrace Oil 68
JX Nippon Oil & Energy Corporation	Super Mulpas DX68

## Terms of warranty

### (1) Terms of warranty

This will differ according to country and region of sale; please contact a Mitsubishi Electric representative for details.

### (2) Coverage

Parts labor and travel are included free of charge when the failure occurs during normal use for the stated Terms of the warranty (based on proper usage and maintenance as described in the operations manual and sales agreement).

#### Coverage exceptions:

- When a failure occurs that was caused by a machine modification that directly affects the machine's functioning or accuracy.
- When a failure occurs caused by the use of non-standard parts, consumables or lubricants.
- When a failure occurs caused by a natural disaster such as lightning, earthquake or storms and flooding.
- When the use of non-recommended consumables or aftermarket parts are used such as filters or flushing nozzles.

Please be aware that any workpiece/property damage and operation loss which may be associated with any fault of our machine are not covered by this warranty.

### (3) Post Warranty / Expected Service Life

After the warranty period expires, all standard service rates and travel expenses will apply. Normal service life expectancy is 11 years after installation, but there may be some cases where discontinued electrical parts such as semiconductors and motors will reduce this period.

PLC

MELSEC-Q Series Universal Model

Introducing the high-speed QCPU (QnUDVCPU) for faster processing of large data volumes.

- ◎Realize high-speed, high-accuracy machine control with various iQ Platform compatible controllers and multiple CPUs.
- ◎Easily connect to GOTs and Programming tools using built-in Ethernet port.
- ◎25 models from 10 k step small capacity to 1000 k step large capacity, are available.
- ◎Seamless communication and flexible integration at any network level.



Product Specifications

Program capacity	10k steps to 1000k steps
Number of I/O points [X/Y], number of I/O device points [X/Y]	256 points to 4096 points/8192 points
Basic instruction processing speed (LD instruction)	120ns to 1.9ns
External connection interface	USB (all models equipped), Ethernet, RS-232, memory card, extended SRAM cassette
Function module	I/O, analog, high-speed counter, positioning, simple motion, temperature input, temperature control, network module
Module extension style	Building block type
Network	Ethernet, CC-Link IE controller network, CC-Link IE field network, CC-Link, CC-Link/LT, MELSECNET/H, SSCNET III (/H), AnyWire, RS-232, RS-422

AC Servo

Mitsubishi General-Purpose AC Servo MELSERVO-J4 Series

Industry-leading level of high performance servo

- ◎Industry-leading level of basic performance: Speed frequency response (2.5kHz), 4,000,000 (4,194,304p/rev) encoder
- ◎Advanced one-touch tuning function achieves the one-touch adjustment of advanced vibration suppression control II, etc.
- ◎Equipped with large capacity drive recorder and machine diagnosis function for easy maintenance.
- ◎2-axis and 3-axis servo amplifiers are available for energy-conservative, space-saving, and low-cost machines.



Product Specifications

Power supply specifications	1-phase/3-phase 200V AC, 1-phase 100V AC, 3-phase 400V AC
Command interface	SSCNET III/H, SSCNET III (compatible in J3 compatibility mode), CC-Link IE Field Network interface with Motion, pulse train, analog
Control mode	Position/Speed/Torque/Fully closed loop
Speed frequency response	2.5kHz
Tuning function	Advanced one-touch tuning, advanced vibration suppression control II, robust filter, etc.
Safety function	STO, SS1 SS2, SOS, SLS, SBC, SSM (compatible when combined with motion controller)
Compatible servo motor	Rotary servo motor (rated output: 0.05 to 22kW), linear servo motor (continuous thrust 50 to 3000N), direct drive motor (rated torque: 2 to 240N·m)

CNC

Mitsubishi CNC M700V Series

High-grade model equipped with advanced complete nano control

- ◎Achieve complete nano control with the latest RISC-CPU and high-speed optical servo network.
- ◎Realize super-high grade processing by combining the complete nano control, state-of-the-art SSS control and OMR control, etc.
- ◎Display of essential information of grouped on three screens to greatly reduce processing setup time with easy operability.
- ◎The M700VW Series with WindowsXPe and M700VS Series with integrated control unit and display type are available.



Product Specifications

Maximum number of control axes (NC axes + spindles + PLC axes)	16 axes (M720VW/M720VS have 12 axes)
Maximum number of part systems	Machining center system: 2 systems Lathe system: 4 systems
Least command increment	1nm (M720VW/M720VS 0.1μm)
Least control increment	1nm
Maximum program capacity	2,000kB(5,120m)
Maximum PLC program capacity	128,000 steps
Main functions (for machining center)	Simultaneous 5-axis machining, SSS control, high-speed high-accuracy control, tool nose point control, tilt plane machining, etc.
Main functions (for lathe)	Milling interpolation, 2-system simultaneous thread cutting, inter-system control axis synchronization, control axis superimposition, combination control, etc.

Laser Processing Machine | CO<sub>2</sub> 2-Dimensional Laser Processing Machine eX-Series

A global standard CO<sub>2</sub> 2-dimensional laser processing systems.

- ◎Productivity has been dramatically enhanced owing to improved acceleration and the latest control technologies exclusive to Mitsubishi Electric.
- ◎2 Action Cutting allows for the entire process, from job setup to parts cutting, to be completed in two simple actions.
- ◎When not processing, the system switches to ECO mode and the resonator stops idling. Minimizes energy consumption, reducing running costs by up to 99%\*1 during standby.

\*1: Compared to the previous LV-Series with Mitsubishi's designated benchmark shape.



Product specifications	
Model Name	ML3015eX
Drive system	Flying optic (3-axis beam movement)
Stroke (X×Y×Z) [mm]	3100×1565×150
Rapid feedrate [m/min]	X,Y axes: Max. 100; Z-axis: Max. 65
Processing feedrate [m/min]	Max. 50
Positioning accuracy [mm]	0.05 / 500 (X,Y axes)
Repeat accuracy [mm]	± 0.01 (X,Y axes)
Rated output [W]	4500

Laser Processing Machine for Substrate Drilling | GTW4 Series

Ever-evolving global standard machine

- ◎Newly-developed super-fast galvano and 360W high-power resonator achieve industry-leading productivity.
- ◎Laser beam generated by unparalleled resonator enables stable high-quality copper-direct processing on various surface treatments.
- ◎Single machine can support variety of processing application with Mitsubishi unique powerful laser and optimum beam control.
- ◎Original resonator structure, which can be refreshed by replacing some parts only, realizes low operating cost.



Product specifications	
Model name	ML605GTW4(-H)-5350U/ML605GTW4(-P)-5350U/ML706GTW4-5350U
Processing workpiece dimensions [mm]	620×560/815×662
XY table maximum feedrate [m/min]	50
Laser type	CO <sub>2</sub> laser
Oscillator power [W]	360W
Oscillator set pulse frequency	10 to 10000Hz

Robot | MELFA F Series

High speed, high precision and high reliability industrial robot

- ◎Compact body and slim arm design, allowing operating area to be expanded and load capacity increased.
- ◎The fastest in its class using high performance motors and unique driver control technology.
- ◎Improved flexibility for robot layout design considerations.
- ◎Optimal motor control tuning set automatically based on operating position, posture, and load conditions.



Product Specifications	
Degrees of freedom	Vertical:6 Horizontal:4
Installation	Vertical:Floor-mount, ceiling mount, wall mount (Range of motion for J1 is limited) Horizontal:Floor-mount
Maximum load capacity	Vertical:2-20kg Horizontal:3-20kg
Maximum reach radius	Vertical:504-1503mm Horizontal:350-1,000mm

Product Line-up

Functions and Features

Machining Samples

Intelligent AT

Opt Drive System

Precise Finish Circuit

Natural User Interface

Long Life System

Revolution

Options

Power Supply, Control Specifications, Machine Installation

FA-related Products

Mitsubishi Electric Corporation Nagoya Works is a factory certified for ISO14001 (standards for environmental management systems) and ISO9001(standards for quality assurance management systems)



## MITSUBISHI ELECTRIC CORPORATION

HEAD OFFICE: TOKYO BLDG., 2-7-3, MARUNOUCHI, CHIYODA-KU, TOKYO 100-8310, JAPAN  
 NAGOYA WORKS: 1-14, YADA-MINAMI, 5-CHOME, HIGASHI-KU, NAGOYA 461-8670, JAPAN

\* Not all models are supported for all countries and regions.  
 \* Machine specifications differ according to the country and region, so please check with your dealer.  
 \* Processing data provided in this brochure is for reference only.