


## Layout drawing

Machine area make room for 1 m!

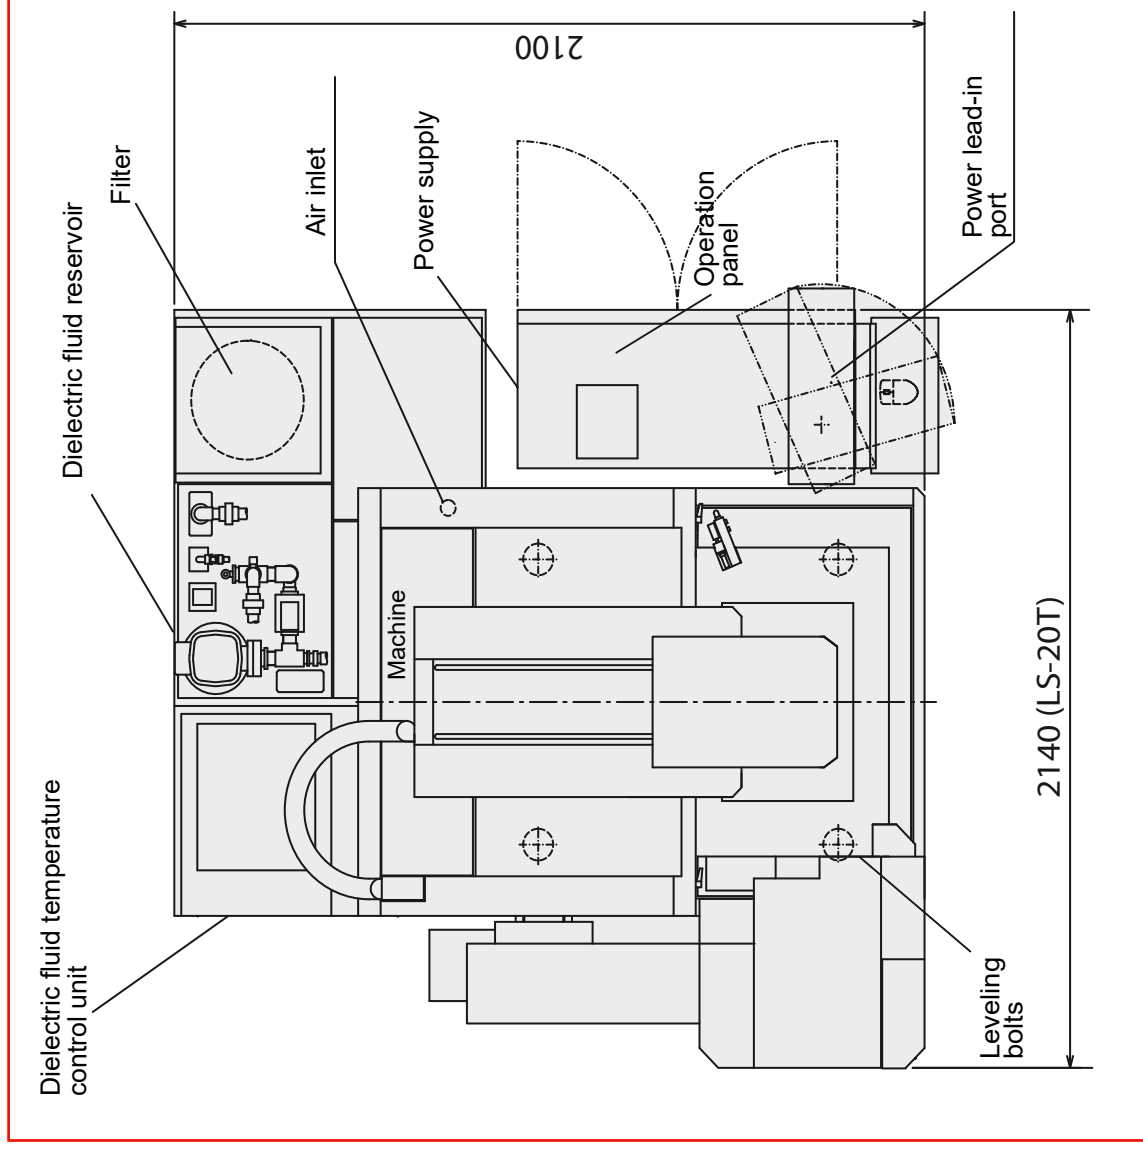

## Additional information

Weight of machine body: 1900 kg  
 Weight of tank without filling: 250 kg  
 Weight of power supply unit: 300 kg  
 Height of machine: 2175 mm  
 (with leveling bolt & exhaust. duct.)

Requested minimum measurement for entrance door/gate (WxH) with LS20T-ATC: 1730 x 2150 mm

- 1: Power supply  
 3 phases 400 V / AC, PE  
 $\pm 10\%$ , 50/60 Hz, 20 kVA  
 Primary fuse min. 32 A slow

**If necessary dependent on generator a transformer is necessary**  
**A transformer with the following measures belongs to the machine: WxDxH (0,8 m x 0,35 m x 0,9 m)**  
**Weight: 199 kg**

The transformer is to be placed in a distance from max. 5 m to the machine. Here the max. cable length is to be considered to the cross section. The data are to be inferred from the documents of the transformer. (Cable not included in delivery volume)  
 The transformer has to be connected to the electricity supply through a customer-sided provided electrician due to the different regulations for each region/country.

- 2: Pneumatic connection: 5-7 kgf/cm<sup>3</sup> » 500-700 kpa  
 Air volume minimum: 27 l/min  
 3/8" hose connection

- 3: For a fire extinguish installation a fixed connection in the near of the control unit is necessary. A socket is not allowed.

- 4: Network connection

- 5: The erosion system should be set up to preferably consolidated concrete floors on a suitable hard industrial ground. To the capacity of MITSUBISHI possibly necessarily becoming shielding measures do not belong in accordance with EMV guideline.

